

HF 360-2 DALI-2 Input Device - concealed

neva
lux**PRESENCE DETECTOR**

EAN 4007841064280

E-Nr. 535932208

 **steinel**

61 x 103 x 103 mm



HF 360-2 DALI-2 Input Device - concealed

PRESENCE DETECTOR

EAN 4007841064280
E-Nr. 535932208

Technical Data

IDENTIFICATION					
Version	Presence detector	Mechanical scalability	No	Main light adjustable	No
DIMENSIONS		Range detail	1 or 2 detection directions can be masked out by stickers for adjustment to the room situation.	Settings via	Bluetooth
Dimensions L x W x H	61 x 103 x 103 mm	Radial range	Ø 12 m (113 m²)	With remote control	No
ELECTRICAL		Tangential range	Ø 12 m (113 m²)	Twilight setting teach	No
Mains connection	12.5 – 22 V	Mounting height	2,50 – 4,00 m	HOUSING & MATERIAL	
Supply voltage detail	DALI bus	Optimal mounting height	2,8 m	Protection class (IP)	IP20
SENSOR TECHNOLOGY		CONNECTIVITY		Ambient temperature	from -25 up to 50 °C
Max. mounting height	4,00 m	Networking	Yes	Mounting location	ceiling
Sensor technology	High frequency	Type of networking	Master/slave	Application location	Indoors
Transmission power	< 1 mW	Networking via	Bluetooth DALI bus	Mounting type	Concealed wiring
HF technology	5,8 GHz	With bus coupler	Yes	Material	Plastic
With motion detector	Yes	LIGHTING TECHNOLOGY		Application room	Indoors WC / washroom function room / ancillary room kitchenette stairwell
Detection	also through glass, wood and stud walls	Soft light start	No	Colour	white
Detection angle	360 °	Continuous light	selectable	RAL colour	9003
Opening angle	140 °	Constant light regulation	No	SCOPE OF DELIVERY & WARRANTY	
Sneak-under protection	Yes	SETTINGS		Manufacturer warranty	5 years
Segment-by-segment masking	No	Twilight switch	Yes	Corner wall bracket included	No
Electronic scalability	Yes	Twilight setting	2 – 2000 lx	CERTIFICATES & EPREL	
		Base light function	No	Certificates	DALI-2

HF 360-2 DALI-2 Input Device - concealed


PRESENCE DETECTOR

EAN 4007841064280

E-Nr. 535932208

Illustrations

TECHNICAL DRAWINGS

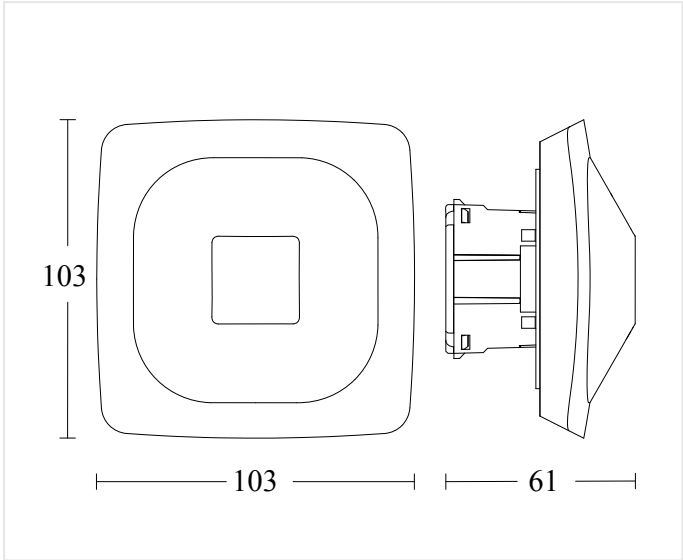

61 x 103 x 103 mm

MOUNTING HEIGHT

2,50 – 4,00 m BEREICH	2,8 m OPTIMAL	4,00 m MAX
---	-------------------------------------	----------------------------------


HF 360-2 DALI-2 Input Device - concealed

PRESENCE DETECTOR

EAN 4007841064280
E-Nr. 535932208

Wiring Diagrams

WIRING DIAGRAM 1

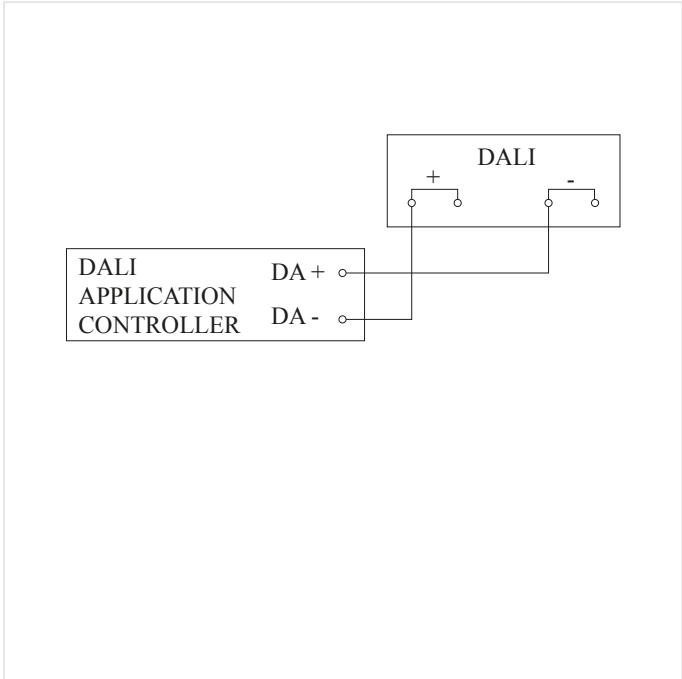

Circuit diagram

HF 360-2 DALI-2 Input Device - concealed

PRESENCE DETECTOR

EAN 4007841064280

E-Nr. 535932208

Highlights



UV-resistant plastic

HF 360-2 DALI-2 Input Device - concealed

PRESENCE DETECTOR

EAN 4007841064280

E-Nr. 535932208

Accessories

ORDERING INFORMATION	
Art.-Nr.	064280
EAN	4007841064280
E-Number	535932208
Typ	HF 360-2 DALI-2 Input Device - concealed

neva
lux

nevalux AG
Neugrütstrasse 2
8610 Uster
+41 44 508 78 78
info@nevalux.swiss