

IS 345 MX Highbay DALI-2 Input Device - surface, sq.

neva
lux

MOTION DETECTOR

EAN 4007841057398

E-Nr. 535942007

 **steinel**

65 x 95 x 95 mm



IS 345 MX Highbay DALI-2 Input Device - surface, sq.

MOTION DETECTOR

EAN 4007841057398
E-Nr. 535942007

Technical Data


IDENTIFICATION					
Version	Motion detectors	Tangential range	30 x 4 m (120 m²)	Main light adjustable	No
DIMENSIONS		Switching zones	280 switching zones	Settings via	Bus
Dimensions L x W x H	65 x 95 x 95 mm	Mounting height	4 – 16,00 m	With remote control	No
ELECTRICAL		Optimal mounting height	12 m	Twilight setting teach	No
Mains connection	12 – 22,5 V / 50 – 60 Hz	CONNECTIVITY		HOUSING & MATERIAL	
Supply voltage detail	DALI bus	Networking	Yes	Protection class (IP)	IP54
Control output DALI	Addressable/slave	Type of networking	Master/slave	Ambient temperature	from -20 up to 50 °C
SENSOR TECHNOLOGY		Networking via	DALI bus	Mounting location	ceiling
Max. mounting height	16,00 m	Number of DALI participants	3	Application location	Indoors
Sensor technology	passive infrared	With bus coupler	Yes	Mounting type	Surface wiring
With motion detector	Yes	LIGHTING TECHNOLOGY		Material	Plastic
Detection angle	360 °	Soft light start	No	Application room	Indoors high-bay warehouse
Opening angle	90 °	Constant light regulation	No	Colour	white
Sneak-under protection	Yes	SETTINGS		RAL colour	9003
Segment-by-segment masking	Yes	Twilight switch	Yes	SCOPE OF DELIVERY & WARRANTY	
Electronic scalability	No	Twilight setting	2 – 1000 lx	Manufacturer warranty	5 years
Mechanical scalability	No	Time setting	5 s – 15 Min.	Corner wall bracket included	No
Radial range	30 x 4 m (120 m²)	Base light function	No	CERTIFICATES & EPREL	
		Base light function time	1-30 min, all night	Certificates	DALI-2

IS 345 MX Highbay DALI-2 Input Device - surface, sq.
MOTION DETECTOR

EAN 4007841057398
E-Nr. 535942007

Illustrations

TECHNICAL DRAWINGS

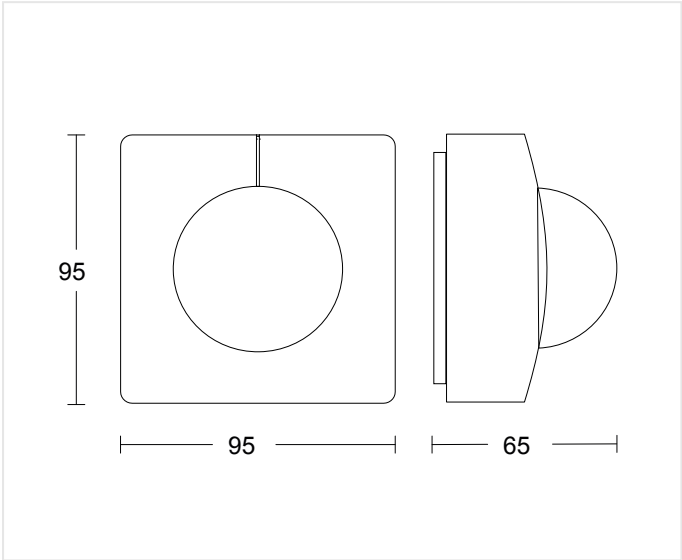

65 x 95 x 95 mm

MOUNTING HEIGHT

4 – 16,00 m BEREICH	12 m OPTIMAL	16,00 m MAX
------------------------	-----------------	----------------


IS 345 MX Highbay DALI-2 Input Device - surface, sq.

MOTION DETECTOR

EAN 4007841057398
E-Nr. 535942007

Wiring Diagrams

WIRING DIAGRAM 1

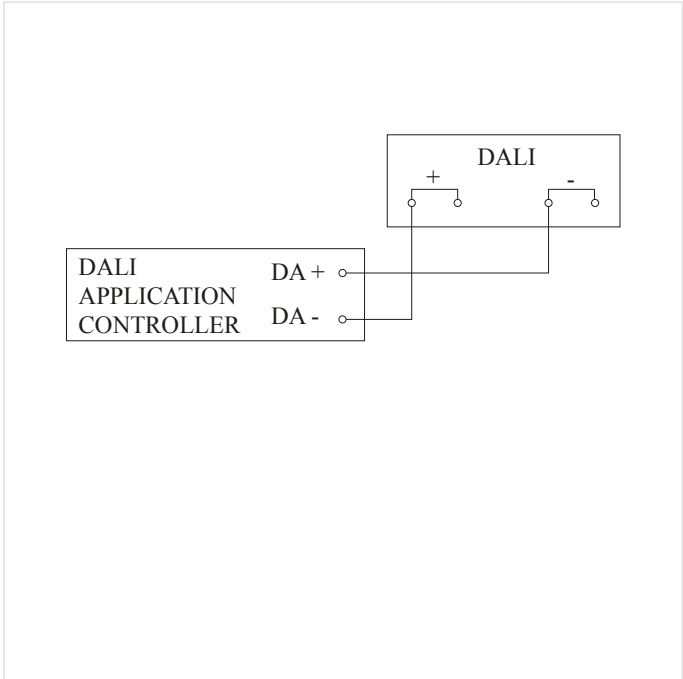

Circuit diagram

IS 345 MX Highbay DALI-2 Input Device - surface, sq.

MOTION DETECTOR


EAN 4007841057398

E-Nr. 535942007

Highlights



UV-resistant plastic

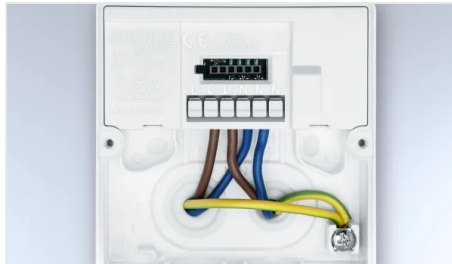

Large terminal compartment

IS 345 MX Highbay DALI-2 Input Device - surface, sq.
MOTION DETECTOR

EAN 4007841057398
E-Nr. 535942007

Accessories

ARTICLE NUMBER	DESCRIPTION	CATEGORY
 4007841009151	Smart Remote	Accessory
 4007841056711	Schwarze Blende für IR-Sensoren Aufputz eckig	Accessory

ORDERING INFORMATION

Art.-Nr.

057398

EAN

4007841057398

E-Number

535942007

Typ

IS 345 MX Highbay DALI-2 Input Device - surface, sq.

neva
lux

nevalux AG
Neugrütstrasse 2
8610 Uster
+41 44 508 78 78
info@nevalux.swiss