# RS PRO P2 SP neutral white

**LED INDOOR LIGHT WITHOUT SENSOR, SHOCK-TESTED**

EAN 221807

- Including STEINEL LED system
- Intelligent soft light start
- Interconnectable by cable (maximum of 10 units)

320 x 110 mm



# RS PRO P2 SP neutral white

EAN 221807

**LED INDOOR LIGHT WITHOUT SENSOR, SHOCK-TESTED**

## Technical Data

### IDENTIFICATION

| | |
|---|---|
| Variant | P2 convex |

### DIMENSIONS

| | |
|---|---|
| Dimensions Ø × H | 320 x 110 mm |

### ELECTRICAL

| | |
|---|---|
| Mains connection | 220 – 240 V / 50 – 60 Hz |
| Power | 14,1 W |

### SENSOR TECHNOLOGY

| | |
|---|---|
| With motion detector | No |

### LIGHTING TECHNOLOGY

| | |
|---|---|
| Measured luminous flux 360° | 1708 lm |
| Colour temperature | 4000 K |
| With illuminant | Yes, STEINEL LED system |
| Illuminant | LED cannot be replaced |
| Base | without |
| LED cooling system | Passive Thermo Control |
| Soft light start | Yes |

### LIFETIME

| | |
|---|---|
| LED lifetime max. °C | 50000 h |
| LED lifetime L70B50 25°C | > 60000 h |
| Luminous flux decline per LM80 | L80B10 |

### SETTINGS

| | |
|---|---|
| Main light adjustable | No |

### HOUSING & MATERIAL

| | |
|---|---|
| Impact resistance | IK03 |
| Protection class (IP) | IP54 |
| Protection class | II |
| Ambient temperature | from -10 up to 40 °C |
| Housing material | Plastic |
| Cover material | Plastic, opal |
| Mounting location | ceiling wall |
| Colour | white |

### SCOPE OF DELIVERY & WARRANTY

| | |
|---|---|
| Manufacturer warranty | 5 years |

### CERTIFICATES & EPREL

| | |
|---|---|
| Certificates | DEKRA |
| EPREL category | Surrounded product with integrated light source |


# RS PRO P2 SP neutral white

EAN 221807

**LED INDOOR LIGHT WITHOUT SENSOR, SHOCK-TESTED**

## Illustrations

### TECHNICAL DRAWINGS

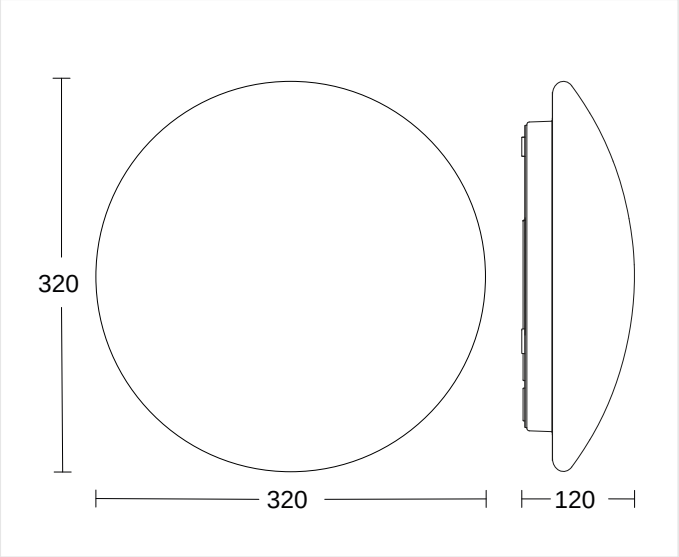


320 x 110 mm


# RS PRO P2 SP neutral white

**LED INDOOR LIGHT WITHOUT SENSOR, SHOCK-TESTED**

EAN 221807


## Wiring Diagrams

**WIRING DIAGRAM 1**

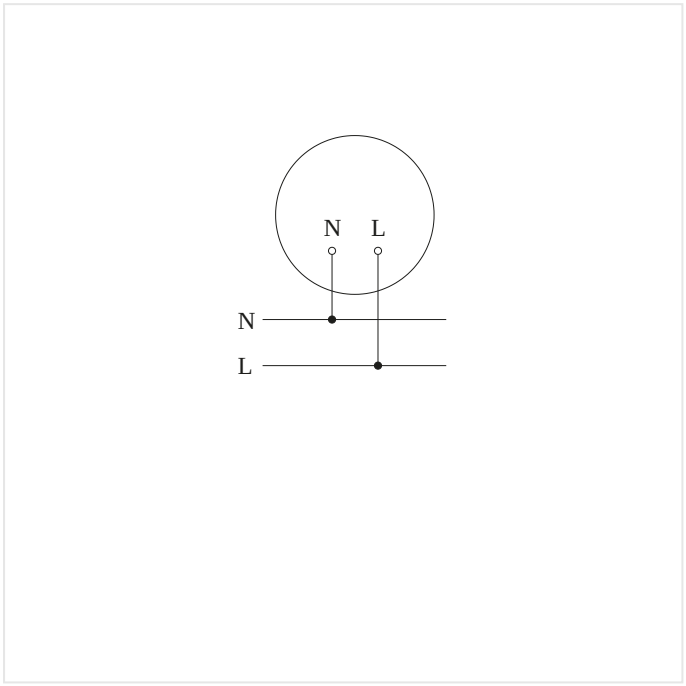


Master circuit diagram

**WIRING DIAGRAM 2**

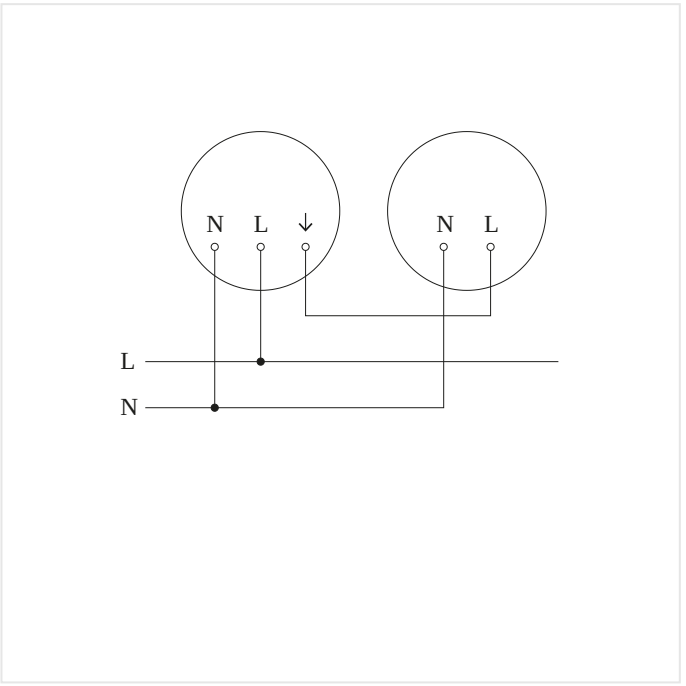


Master/slave interconnection circuit diagram

# RS PRO P2 SP neutral white

**LED INDOOR LIGHT WITHOUT SENSOR, SHOCK-TESTED**

EAN 221807

## Accessories

**ORDERING INFORMATION**

| | |
|---|---|
| Art.-Nr. | 221807 |
| EAN | 221807 |
| Typ | **RS PRO P2 SP neutral white** |

nevalux AG
Neugrütstrasse 2
8610 Uster
+41 44 508 78 78
info@nevalux.swiss