

Spot Garden SC 24V with motion detector & Bluetooth

neva
lux

24V-GARDEN LED SPOT

EAN 4007841089344

Your garden. Your light. With the 24V garden lighting system, you can make your outdoor area shine. Simply connect the light, cable and power supply unit and set via the STEINEL Connect app.

- Stylish coloured light accents: swivelling 24V garden spotlight with ground spike with motion detector
- High-quality material: Elegant and puristic design made of durable aluminium
- STEINEL Connect App: Easy configuration and networking of multiple lights via Bluetooth
- True Color: true-to-life color rendering in warm white, cool white and color, dimmable for flexible lighting scenes
- Plug & Play: All components can be connected quickly and without tools, and can be expanded as desired
- Well planned: This light consumes 7,9 W. To operate it, you'll need a 24V power supply that matches the total power requirement – not included.

 **steinel**

69 x 118 x 369 mm



Spot Garden SC 24V with motion detector & Bluetooth

EAN 4007841089344

24V-GARDEN LED SPOT

Technical Data

DIMENSIONS		Colour temperature		all colors + 1800-4000 K		Base light function in percent		10 – 100 %			
Dimensions L x W x H		69 x 118 x 369 mm		LED colour deviation		SDCM3		Base light function percent from		10 %	
ELECTRICAL				Colour rendering index		= 90					
Power		7,9 W		With illuminant		Yes, STEINEL LED system					
SENSOR TECHNOLOGY				Illuminant		LED cannot be replaced					
Sensor technology		passive infrared		Soft light start		Yes		HOUSING & MATERIAL			
With motion detector		Yes		Continuous light		selectable		Protection class (IP)		IP65	
Detection angle		90 °		LIFETIME				Protection class		III	
Opening angle		90 °		LED lifetime L70B50 25°C		> 60000 h		Ambient temperature		from -20 up to 40 °C	
Sneak-under protection		No		Average rated power supply lifetime at 25 °C		> 60000 h		Housing material		Aluminium	
Segment-by-segment masking		No		SETTINGS				Cover material		PC structured	
Electronic scalability		No		Twilight setting		2 – 2000 lx		Mounting location		Floor	
Mechanical scalability		No		Time setting		5 s – 60 Min.		Application location		Outdoors	
Radial range		r = 2 m (3 m²)		Base light function		Yes		Mounting type		Other	
Tangential range		r = 10 m (79 m²)		Base light function time		5s-60 min		Material		Aluminium	
CONNECTIVITY				Main light adjustable		10 - 100 %		Application room		garden outdoors terrace / balcony	
Networking		Yes		Functions		DIM function Motions sensor Color temperature change Light sensor Normal / test mode Push button configuration		Colour		Anthracite	
Networking via		Bluetooth Mesh		Settings via		Bluetooth Mesh		SCOPE OF DELIVERY & WARRANTY			
Slave mode adjustable		Yes		With remote control		No		Manufacturer warranty		3 years	
LIGHTING TECHNOLOGY				Twilight setting teach		Yes		House number sheet included		No	
Measured luminous flux 360°		363 lm						CERTIFICATES & EPREL			
Efficiency		46 lm/W						Certificates		TSU	
								EPREL category		Surrounded product with integrated light source	


Spot Garden SC 24V with motion detector & Bluetooth

EAN 4007841089344

24V-GARDEN LED SPOT

Illustrations

TECHNICAL DRAWINGS

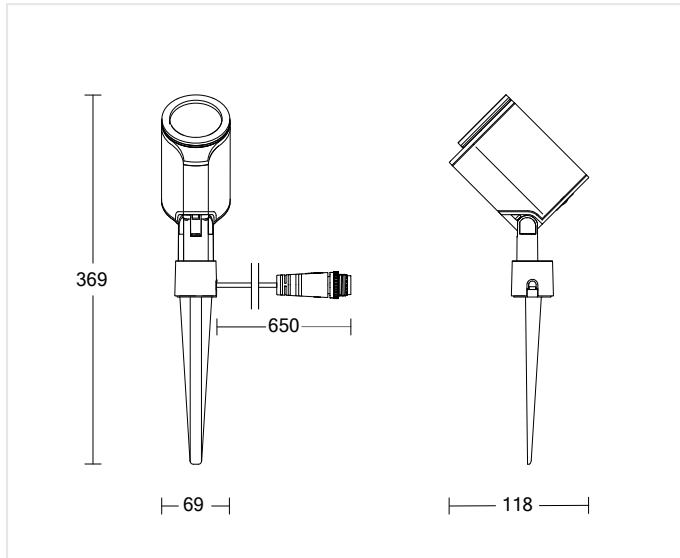

69 x 118 x 369 mm

Spot Garden SC 24V with motion detector & Bluetooth


EAN 4007841089344

24V-GARDEN LED SPOT

Highlights



Plug&Play - Easy to install

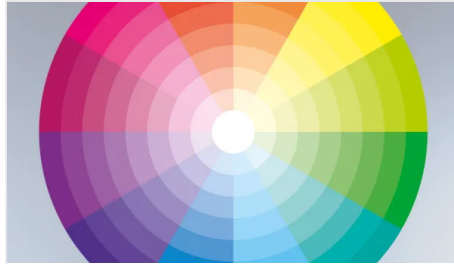

True Color



Dimmable lighting



Sturdy ground spike



High-quality aluminium

Spot Garden SC 24V with motion detector & Bluetooth

EAN 4007841089344

24V-GARDEN LED SPOT

Accessories

ORDERING INFORMATION

Art.-Nr. 089344

EAN 4007841089344

Typ Spot Garden SC 24V with motion detector & Bluetooth

neva
lux

nevalux AG
Neugrütstrasse 2
8610 Uster
+41 44 508 78 78
info@nevalux.swiss