

L 14 S with motion detector

E27 SENSOR-SWITCHED OUTDOOR LIGHT

neva
lux

EAN 4007841094263

- Modern outdoor light with motion detector and house number sticker
- Made of UV-resistant, impact-resistant material according to IK05 for a long service life
- Automatic light thanks to 180° infrared sensor in housing colour with up to 10 m detection on movement
- Detection area and range can be individually limited using the cover stickers supplied and the swivelling sensor (90° vertical)
- With E27 socket for energy-saving lamps or LED bulbs with max. 15 W (not included in delivery)
- Incl. house number arch and mounting accessories - plastic-free packaging

● steinel

125 x 125 x 275 mm



L 14 S with motion detector

EAN 4007841094263

E27 SENSOR-SWITCHED OUTDOOR LIGHT

Technical Data

DIMENSIONS		CONNECTIVITY		Protection class (IP)	
Dimensions L x W x H		Networking	No	IP44	
125 x 125 x 275 mm		Slave mode adjustable	No	Protection class	
ELECTRICAL		LIGHTING TECHNOLOGY		II	
Mains connection		With illuminant		Ambient temperature	
230 – 240 V / 50 Hz		No		from -20 up to 40 °C	
Power		Base		Housing material	
15 W		E27		Plastic	
SENSOR TECHNOLOGY		Soft light start		Cover material	
Max. mounting height		No		PMMA, opal	
Sensor technology		SETTINGS		Cover material (scope of delivery)	
passive infrared		Twilight switch		sticker	
With motion detector		Yes		Mounting location	
Detection angle		Twilight setting		wall	
180 °		2 – 2000 lx		Application location	
Segment-by-segment masking		Time setting		Outdoors	
Yes		8 s – 35 Min.		Mounting type	
Electronic scalability		Base light function		Surface wiring	
No		No		Material	
Mechanical scalability		Main light adjustable		Plastic	
No		No		Application room	
Radial range		Functions		outdoors	
r = 3 m (14 m²)		Motions sensor Light sensor		Colour	
Tangential range		Settings via		Anthracite	
r = 10 m (157 m²)		Potentiometers		RAL colour	
Mounting height		With remote control		7016	
1,8 – 3 m		No		SCOPE OF DELIVERY & WARRANTY	
Optimal mounting height		Twilight setting teach		Manufacturer warranty	
2 m		No		3 years	
HOUSING & MATERIAL		CERTIFICATES & EPREL		EPREL category	
Impact resistance		IK05		Surrounding product without light source (luminaire)	


L 14 S with motion detector

EAN 4007841094263

E27 SENSOR-SWITCHED OUTDOOR LIGHT

Illustrations

TECHNICAL DRAWINGS

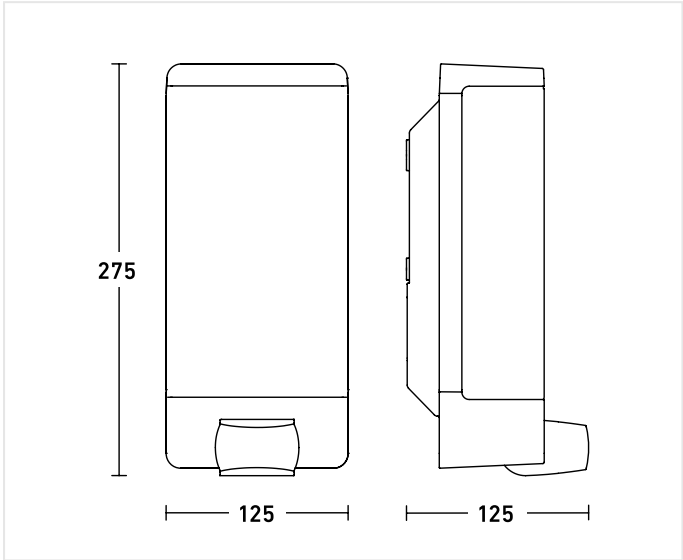

125 x 125 x 275 mm

MOUNTING HEIGHT

1,8 – 3 m BEREICH	2 m OPTIMAL	3,00 m MAX
----------------------	----------------	---------------


L 14 S with motion detector

EAN 4007841094263

E27 SENSOR-SWITCHED OUTDOOR LIGHT

Wiring Diagrams

WIRING DIAGRAM 1

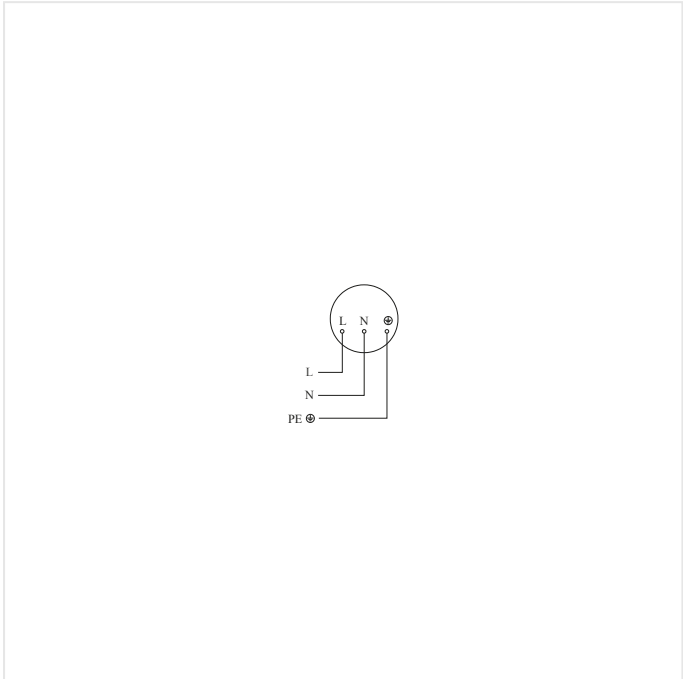

Circuit diagram

L 14 S with motion detector

EAN 4007841094263

E27 SENSOR-SWITCHED OUTDOOR LIGHT

Highlights



UV resistant material



Impact-resistant material rated to IK05



Including sheet of self-adhesive house numbers

L 14 S with motion detector

EAN 4007841094263

E27 SENSOR-SWITCHED OUTDOOR LIGHT

Accessories

ORDERING INFORMATION	
Art.-Nr.	094263
EAN	4007841094263
Typ	L 14 S with motion detector
nevalux nevalux AG Neugrütstrasse 2 8610 Uster +41 44 508 78 78 info@nevalux.swiss	