IS 3180 KNX - surface, sq.

MOTION DETECTOR

EAN 4007841058135
E-Nr. 535942868

steinel

65 x 95 x 95 mm



IS 3180 KNX - surface, sq.

MOTION DETECTOR

EAN 4007841058135
E-Nr. 535942868

Technical Data

IDENTIFICATION

Version	Motion detectors

DIMENSIONS

Dimensions L × W × H	65 x 95 x 95 mm

ELECTRICAL

Supply voltage detail	KNX bus

SENSOR TECHNOLOGY

Max. mounting height	2,50 m
Sensor technology	passive infrared
Detection angle	180 °
Opening angle	90 °
Sneak-under protection	Yes
Segment-by-segment masking	Yes
Electronic scalability	No
Mechanical scalability	No
Radial range	r = 4 m (25 m²)
Tangential range	r = 20 m (628 m²)
Switching zones	448 switching zones
Mounting height	1,80 – 2,50 m
Optimal mounting height	2 m

CONNECTIVITY

Networking	Yes
Type of networking	Master/slave
KNX functions	Photo-cell controller Basic light level function Light level HVAC output Constant-lighting control Light output 2x Presence output Day / night function Logic gate
With bus coupler	Yes
Control technology	On/Off-Leuchte

LIGHTING TECHNOLOGY

Soft light start	Yes
Continuous light	selectable
Constant light regulation	Yes

SETTINGS

Twilight switch	Yes
Twilight setting	2 – 1000 lx
Time setting	5 s – 15 Min.
Base light function	Yes
Main light adjustable	0 - 100 %
Settings via	ETS software Remote control Bus Smart Remote
With remote control	No
Twilight setting teach	Yes

HOUSING & MATERIAL

Protection class (IP)	IP54
Ambient temperature	from -20 up to 50 °C
Mounting location	corner wall
Application location	Indoors Outdoors
Mounting type	Surface wiring
Material	Plastic
Application room	Indoors all round the building corridor / aisle courtyard & driveway function room / ancillary room multi-storey / underground car park outdoors stairwell
Colour	white
RAL colour	9003

SCOPE OF DELIVERY & WARRANTY

Manufacturer warranty	5 years
Corner wall bracket included	No


IS 3180 KNX - surface, sq.

MOTION DETECTOR

EAN **4007841058135**
E-Nr. **535942868**

Illustrations

TECHNICAL DRAWINGS

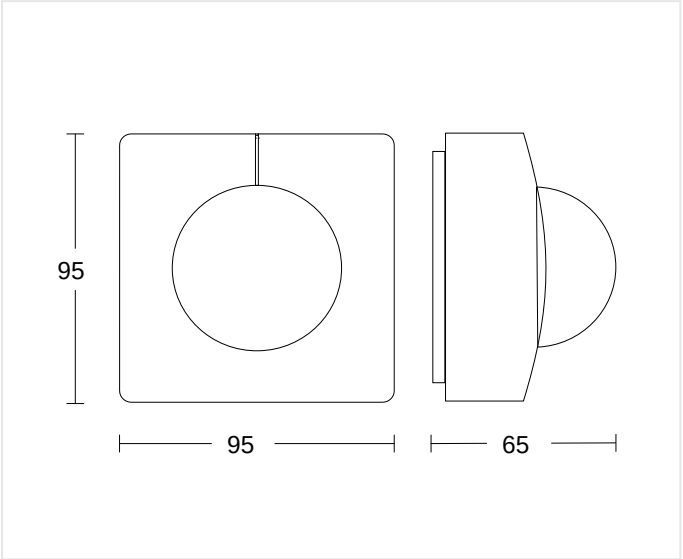

65 x 95 x 95 mm

MOUNTING HEIGHT

1,80 – 2,50 m	2 m	2,50 m
BEREICH	OPTIMAL	MAX

IS 3180 KNX - surface, sq.

MOTION DETECTOR

EAN 4007841058135
E-Nr. 535942868


Highlights



UV-resistant plastic



Optional corner wall mount bracket

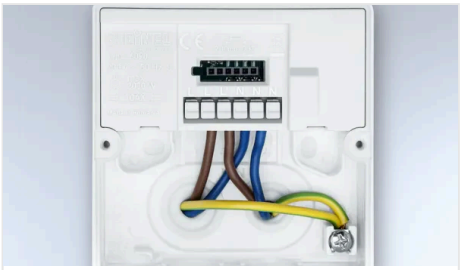

Large terminal compartment



Optional remote controls




Smart Remote remote control optional

IS 3180 KNX - surface, sq.

MOTION DETECTOR

EAN 4007841058135
E-Nr. 535942868

Accessories

	ARTICLE NUMBER	DESCRIPTION	CATEGORY
	4007841009151	**Smart Remote**	Accessory
	4007841593018	**Service Fernbedienung RC6 KNX**	Accessory
	4007841035174	**Eckwandhalter 3000 weiss**	Accessory
	4007841592912	**Nutzer Fernbedienung RC7 KNX**	Accessory
	4007841056711	**Schwarze Blende für IR-Sensoren Aufputz eckig**	Accessory

ORDERING INFORMATION

Art.-Nr.	058135
EAN	4007841058135
E-Number	535942868
Typ	**IS 3180 KNX - surface, sq.**

neva lux

nevalux AG
Neugrütstrasse 2
8610 Uster
+41 44 508 78 78
info@nevalux.swiss