

NightmatIQ Plus Anthracite

PHOTOELECTRIC LIGHTING CONTROLLER

neva
lux

EAN 4007841066116

- Photo-cell controller for automatic night-time illumination of house fronts, gardens, shop windows and other areas
- Straight, flat design made of UV-resistant material
- Wireless networking via Bluetooth and easy setting via STEINEL Connect App
- Thanks to the brightness sensor, the light comes on automatically at dusk - and goes off again at dawn
- Functions: Individual time settings via timer, night-economy mode, teach function
- The twilight value can be individually adjusted from 1 - 1000 lux ambient brightness via the app
- Incl. mounting accessories - plastic-free packaging

● steinel

38 x 95 x 95 mm



NightmatIQ Plus Anthracite

PHOTOELECTRIC LIGHTING CONTROLLER

EAN 4007841066116

Technical Data

IDENTIFICATION		Type of networking		Master/master	Master/slave	HOUSING & MATERIAL	
Version	Photo-cell controller	Networking via	Bluetooth Mesh			Protection class (IP)	IP54
DIMENSIONS		LIGHTING TECHNOLOGY				Ambient temperature	from -20 up to 40 °C
Dimensions L x W x H	38 x 95 x 95 mm	Continuous light	selectable			Housing material	Plastic
ELECTRICAL		Constant light regulation	No			Mounting location	wall
Mains connection	220 – 240 V / 50 – 60 Hz	SETTINGS				Application location	Outdoors
Switching output 1 resistive	1000 W	Twilight switch	Yes			Mounting type	Surface wiring
Fluorescent lamps ECG	250 W	Twilight setting	1 – 1000 lx			Material	Plastic
Own consumption	0,5 W	Base light function	No			Application room	Indoors all round the building courtyard & driveway front door outdoors terrace / balcony
SENSOR TECHNOLOGY		Functions	Night economy mode light ON / OFF in the morning Timer			Colour	Anthracite
Sensor technology	Photo-cell controller	Settings via	Bluetooth Mesh App Smartphone			SCOPE OF DELIVERY & WARRANTY	
With motion detector	No	With remote control	No			Manufacturer warranty	3 years
CONNECTIVITY		Twilight setting teach	Yes				
Networking	Yes						


NightmatIQ Plus Anthracite

EAN 4007841066116

PHOTOELECTRIC LIGHTING CONTROLLER

Illustrations

TECHNICAL DRAWINGS

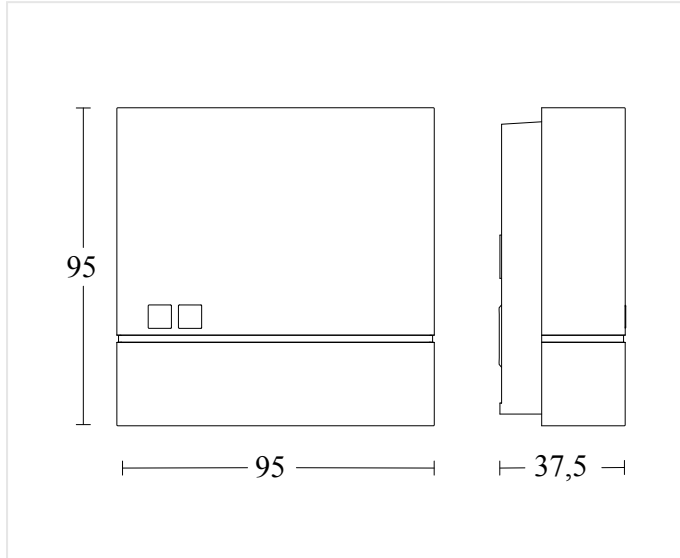

38 x 95 x 95 mm


NightmatIQ Plus Anthracite

PHOTOELECTRIC LIGHTING CONTROLLER

EAN 4007841066116

Wiring Diagrams

WIRING DIAGRAM 1

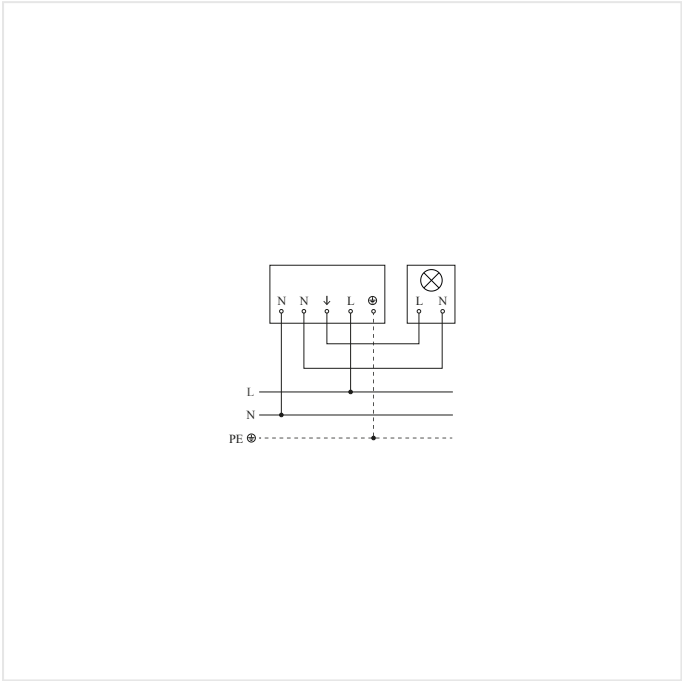


Circuit diagram

NightmatIQ Plus Anthracite

PHOTOELECTRIC LIGHTING CONTROLLER

EAN 4007841066116

Highlights

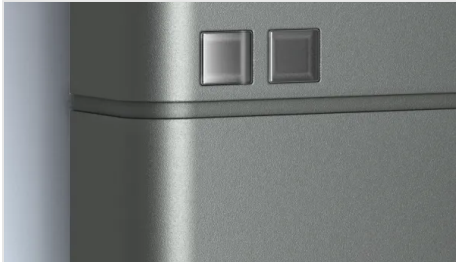

UV resistant material



Interconnectable and adjustable via
Bluetooth

NightmatIQ Plus Anthracite

PHOTOELECTRIC LIGHTING CONTROLLER

EAN 4007841066116

Accessories

ORDERING INFORMATION	
Art.-Nr.	066116
EAN	4007841066116
Typ	NightmatIQ Plus Anthracite
neva lux nevalux AG Neugrütstrasse 2 8610 Uster +41 44 508 78 78 info@nevalux.swiss	