RS PRO 5150 C without motion detector

INDOOR LIGHT WITHOUT SENSOR

EAN 4007841058722
E-Nr. 941375589

- Including STEINEL LED system
- Interconnectable and adjustable via Bluetooth
- Impact-resistant material rated to IK07
- Optional basic lighting level 0 - 100 %
- Adjustable main light brighness (0 - 100%)
- Adjustable mounts for easy installation

1500 x 87 x 58 mm



RS PRO 5150 C without motion detector

INDOOR LIGHT WITHOUT SENSOR

EAN 4007841058722
E-Nr. 941375589

Technical Data

IDENTIFICATION

Type of accessory	Other

DIMENSIONS

Dimensions L × W × H	1500 x 87 x 58 mm

ELECTRICAL

Mains connection	220 – 240 V / 50 – 60 Hz
Power	42 W
Own consumption	0,45 W

SENSOR TECHNOLOGY

With motion detector	No

CONNECTIVITY

Networking	Yes
Control technology	On/Off-Leuchte

LIGHTING TECHNOLOGY

Measured luminous flux 360°	5940 lm
Colour temperature	4000 K
Illuminant	LED cannot be replaced

LIFETIME

LED lifetime max. °C	60000 h
LED lifetime L70B50 25°C	> 60000 h
Luminous flux decline per LM80	L80B10

SETTINGS

Twilight setting	2 – 2000 lx
Time setting	5 s – 60 Min.
Base light function	Yes
Base light function time	1-60 min
Main light adjustable	0 - 100 %
Functions	Encrypted communication\nNeighbouring group function\nFree selection of the light value in a luminaire group\nAdjustable fade time when switching on and off\nConnection to central battery systems
Base light function in percent	0 %
Base light function percent from	0

HOUSING & MATERIAL

Impact resistance	IK07
Protection class (IP)	IP65
Protection class	II
Ambient temperature	-20 – 40 °C
Housing material	Plastic
Cover material	Plastic, structured
Mounting location	ceiling wall
Material	Plastic
Colour	grey

SCOPE OF DELIVERY & WARRANTY

Manufacturer warranty	5 years

CERTIFICATES & EPREL

Certificates	DEKRA
EPREL category	Surrounded product with integrated light source


RS PRO 5150 C without motion detector

INDOOR LIGHT WITHOUT SENSOR

EAN **4007841058722**
E-Nr. **941375589**

Illustrations

TECHNICAL DRAWINGS

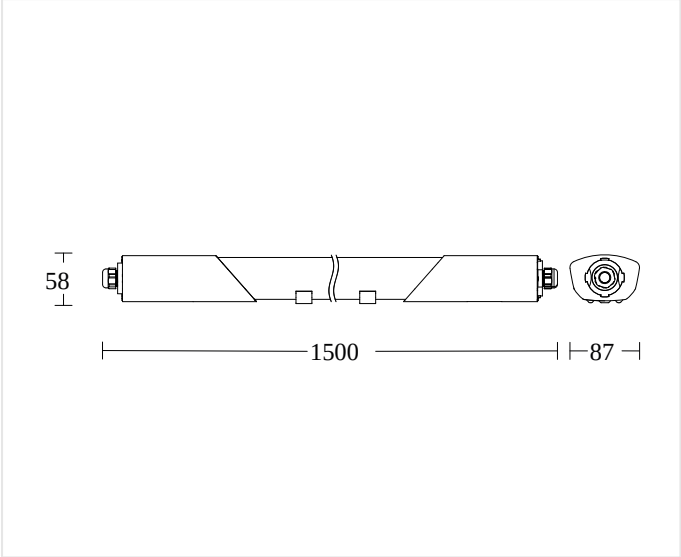

1500 x 87 x 58 mm


RS PRO 5150 C without motion detector

INDOOR LIGHT WITHOUT SENSOR

EAN **4007841058722**
E-Nr. **941375589**

Wiring Diagrams

WIRING DIAGRAM 1

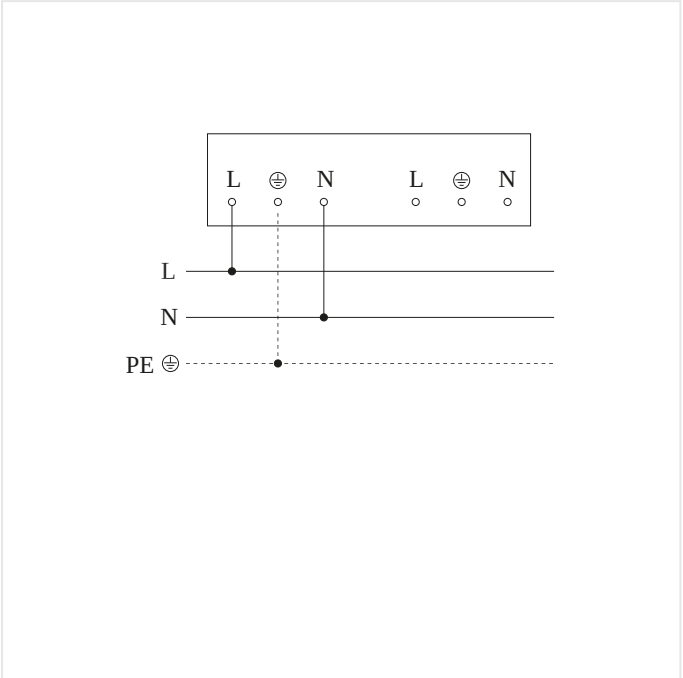

RS PRO 5150 C without motion detector

INDOOR LIGHT WITHOUT SENSOR

EAN **4007841058722**
E-Nr. **941375589**

Accessories

ORDERING INFORMATION

Art.-Nr.	4007841058722
EAN	4007841058722
E-Number	941375589
Typ	**RS PRO 5150 C without motion detector**

nevalux AG
Neugrütstrasse 2
8610 Uster
+41 44 508 78 78
info@nevalux.swiss