

IR Quattro MICRO 6m KNX - black

PRESENCE DETECTOR

neva
lux

EAN 4007841068646

E-Nr. 535918145

● steinel

43 x 71 mm



IR Quattro MICRO 6m KNX - black

PRESENCE DETECTOR

EAN 4007841068646
E-Nr. 535918145

Technical Data

IDENTIFICATION			
Version	Presence detector		
DIMENSIONS			
Dimensions L x W x H	71 x 43 x 43 mm		
Dimensions Ø x H	43 x 71 mm		
ELECTRICAL			
Mains connection	30 V		
Own consumption	0,5 W		
SENSOR TECHNOLOGY			
Max. mounting height	5,00 m		
Sensor technology	passive infrared		
With motion detector	Yes		
Detection angle	360 °		
Opening angle	90 °		
Sneak-under protection	Yes		
Segment-by-segment masking	No		
Electronic scalability	No		
Mechanical scalability	No		
Radial range	4 x 4 m (16 m²)		
Tangential range	6 x 6 m (36 m²)		
Switching zones	168 switching zones		
		Mounting height	2,00 – 5,00 m
		Presence range	4 x 4 m (16 m²)
		Optimal mounting height	2,8 m
		CONNECTIVITY	
		Networking	Yes
		Type of networking	Master/master Master/slave
		Networking via	KNX bus
		KNX functions	Photo-cell controller Basic light level function Light level HVAC output Constant-lighting control Day / night function Presence output Light output 4x Logic gate
		With bus coupler	Yes
		LIGHTING TECHNOLOGY	
		Soft light start	No
		Continuous light	selectable
		Constant light regulation	Yes
		SETTINGS	
		Twilight switch	Yes
		Twilight setting	2 – 1000 lx
		Time setting	60 s – 255 Min.
		Base light function	Yes
		Main light adjustable	0 - 100 %
		Settings via	ETS software Remote control Bus Smart Remote
		With remote control	No
		Twilight setting teach	Yes
		HOUSING & MATERIAL	
		Protection class (IP)	IP65
		Ambient temperature	from -25 up to 55 °C
		Housing material	Plastic
		Cover material	without cover
		Mounting location	ceiling
		Application location	Indoors
		Mounting type	In-ceiling installation
		Material	Plastic
		Application room	Indoors WC / washroom care room function room / ancillary room hotel room one-person office
		Colour	black
		RAL colour	9005
		SCOPE OF DELIVERY & WARRANTY	
		Manufacturer warranty	5 years
		Corner wall bracket included	No

IR Quattro MICRO 6m KNX - black


PRESENCE DETECTOR

EAN 4007841068646

E-Nr. 535918145

Illustrations

TECHNICAL DRAWINGS

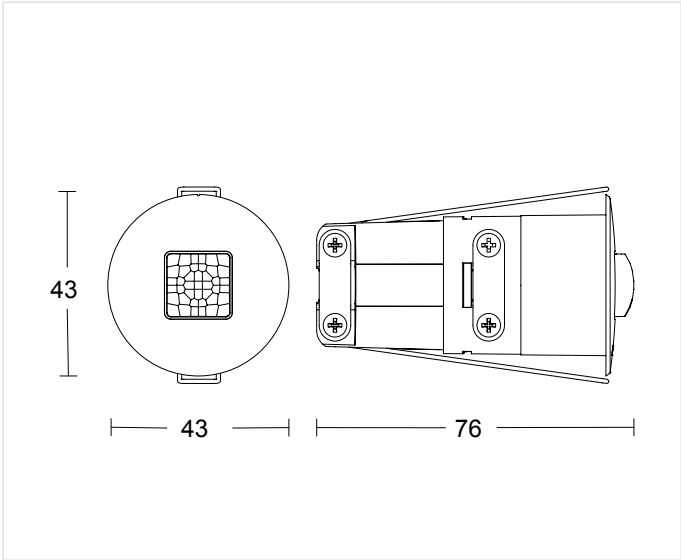

43 x 71 mm

MOUNTING HEIGHT

2,00 – 5,00 m BEREICH	2,8 m OPTIMAL	5,00 m MAX
--------------------------	------------------	---------------

IR Quattro MICRO 6m KNX - black

PRESENCE DETECTOR


EAN 4007841068646

E-Nr. 535918145

Highlights



Miniature precision infrared lens

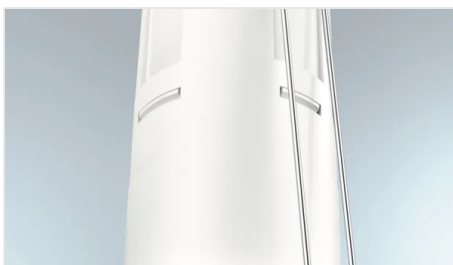

With spring clips



Can only be set using optional remote controls



Smart Remote remote control optional

IR Quattro MICRO 6m KNX - black

PRESENCE DETECTOR

EAN 4007841068646
E-Nr. 535918145

Accessories

ARTICLE NUMBER	DESCRIPTION	CATEGORY
 4007841593018	Service Fernbedienung RC6 KNX	Other
 4007841592912	Nutzer Fernbedienung RC7 KNX	Accessory

ORDERING INFORMATION

Art.-Nr.

068646

EAN

4007841068646

E-Number

535918145

Typ

IR Quattro MICRO 6m KNX - black

nevalux

nevalux AG
Neugrütstrasse 2
8610 Uster
+41 44 508 78 78
info@nevalux.swiss