

HF 360-2 KNX - Surface wiring black

PRESENCE DETECTOR

neva
lux

EAN 4007841086701

E-Nr. 535903148

- Perfect radial detection with a range of up to 25 m, ideal for long corridors and hallways
- Customisable range that can be set individually in both directions
- Control PRO II design for a modern and functional look that enables versatile applications
- Bluetooth technology for simple connection and control via Bluetooth
- Multiple interfaces, compatible with COM1, COM2, DALI-2 APC, DALI-2 IPD, KNX, IP and BT IPD
- External light measurement required for black sensors that can be integrated via Bluetooth or KNX

● steinel

56 x 123 x 123 mm



HF 360-2 KNX - Surface wiring black

PRESENCE DETECTOR

EAN 4007841086701
E-Nr. 535903148

Technical Data

IDENTIFICATION					
Version	Presence detector	Mechanical scalability	No	Twilight setting	2 – 2000 lx
DIMENSIONS		Radial range	Ø 12 m (113 m²)	Time setting	10 s – 1092 Min.
Dimensions L x W x H	56 x 123 x 123 mm	Tangential range	Ø 12 m (113 m²)	Main light adjustable	Yes
ELECTRICAL		Mounting height	2,5 – 4 m	Settings via	Bluetooth Bus
Mains connection	30 V	Optimal mounting height	2,8 m	With remote control	No
Supply voltage detail	KNX bus	CONNECTIVITY		Twilight setting teach	Yes
SENSOR TECHNOLOGY		Networking	Yes	HOUSING & MATERIAL	
Max. mounting height	4,00 m	Networking via	Bluetooth Mesh	Protection class (IP)	IP20
Sensor technology	High frequency	KNX functions	Light output 4x Constant-lighting control Basic light level function Photo-cell controller Light level HVAC output Temperature output Humidity output Presence output Day / night function Dewpoint Comfort	Ambient temperature	from -25 up to 50 °C
Transmission power	< 1 mW	With bus coupler	Yes	Mounting location	ceiling
HF technology	5,8 GHz	LIGHTING TECHNOLOGY		Application location	Indoors
With motion detector	Yes	Soft light start	Yes	Mounting type	Surface wiring
Detection	also through glass, wood and stud walls	Continuous light	selectable	Material	Plastic
Detection angle	360 °	Constant light regulation	Yes	Application room	Indoors WC / washroom function room / ancillary room kitchenette stairwell
Opening angle	160 °	SETTINGS		Colour	black
Sneak-under protection	Yes	Twilight switch	Yes	RAL colour	9005
Segment-by-segment masking	No			SCOPE OF DELIVERY & WARRANTY	
Electronic scalability	Yes			Manufacturer warranty	5 years
				Corner wall bracket included	No


HF 360-2 KNX - Surface wiring black

PRESENCE DETECTOR

EAN 4007841086701
E-Nr. 535903148

Illustrations

TECHNICAL DRAWINGS

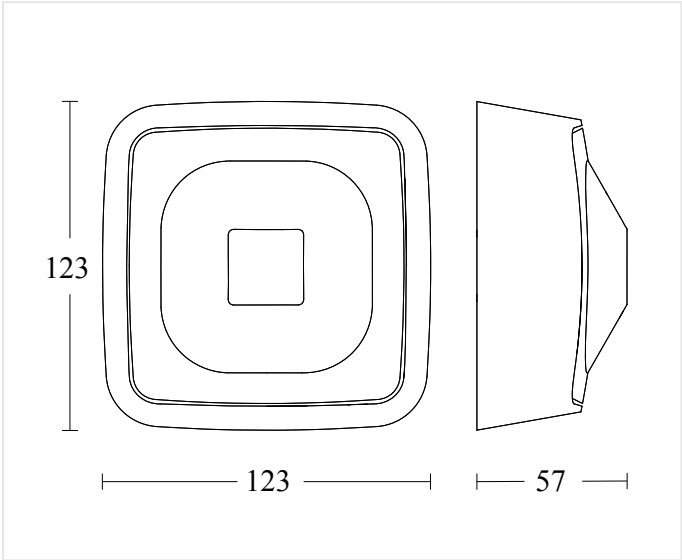

56 x 123 x 123 mm

MOUNTING HEIGHT

2,5 – 4 m BEREICH	2,8 m OPTIMAL	4,00 m MAX
----------------------	------------------	---------------

HF 360-2 KNX - Surface wiring black

PRESENCE DETECTOR

EAN 4007841086701

E-Nr. 535903148

Highlights



UV-resistant plastic

HF 360-2 KNX - Surface wiring black

PRESENCE DETECTOR

EAN **4007841086701**

E-Nr. **535903148**

Accessories

ORDERING INFORMATION

Art.-Nr.	086701
EAN	4007841086701
E-Number	535903148
Typ	HF 360-2 KNX - Surface wiring black

neva
lux

nevalux AG
Neugrütstrasse 2
8610 Uster
+41 44 508 78 78
info@nevalux.swiss