

IR Quattro MICRO 6m KNX - white

PRESENCE DETECTOR

neva
lux

EAN 4007841064129

E-Nr. 535934808

 **steinel**

43 x 71 mm



IR Quattro MICRO 6m KNX - white

PRESENCE DETECTOR

EAN 4007841064129
E-Nr. 535934808

Technical Data

IDENTIFICATION		Switching zones		168 switching zones		Main light adjustable		0 - 100 %	
Version	Presence detector	Mounting height	2,00 – 5,00 m		Settings via	ETS software Remote control Bus Smart Remote			
DIMENSIONS		Presence range	4 x 4 m (16 m²)						
Dimensions L x W x H	71 x 43 x 43 mm	Optimal mounting height	2,8 m		With remote control			No	
Dimensions Ø x H	43 x 71 mm	CONNECTIVITY				Twilight setting teach			Yes
ELECTRICAL		Networking			HOUSING & MATERIAL				
Mains connection	30 V	Type of networking	Master/master Master/slave		Protection class (IP)			IP65	
Own consumption	0,5 W	Networking via	KNX bus		Ambient temperature	from -25 up to 55 °C			
Supply voltage detail	KNX bus	KNX functions	Photo-cell controller Basic light level function Light level HVAC output Constant- lighting control Day / night function Presence output Light output 4x Logic gate		Housing material			Plastic	
SENSOR TECHNOLOGY						Cover material			without cover
Max. mounting height	5,00 m					Mounting location			ceiling
Sensor technology	passive infrared					Application location			Indoors
With motion detector	Yes	With bus coupler	Yes		Mounting type	In-ceiling installation			
Detection angle	360 °	LIGHTING TECHNOLOGY				Material			Plastic
Opening angle	90 °	Soft light start	Yes		Application room	Indoors WC / washroom care room function room / ancillary room hotel room one-person office			
Sneak-under protection	Yes	Continuous light	selectable		Colour			white	
Segment-by-segment masking	No	Constant light regulation	Yes		RAL colour			9003	
		SETTINGS				SCOPE OF DELIVERY & WARRANTY			
Electronic scalability	No	Twilight switch	Yes		Manufacturer warranty			5 years	
Mechanical scalability	No	Twilight setting	2 – 1000 lx		Corner wall bracket included			No	
Radial range	4 x 4 m (16 m²)	Time setting	60 s – 255 Min.						
Tangential range	6 x 6 m (36 m²)	Base light function	Yes						

IR Quattro MICRO 6m KNX - white


PRESENCE DETECTOR

EAN 4007841064129

E-Nr. 535934808

Illustrations

TECHNICAL DRAWINGS

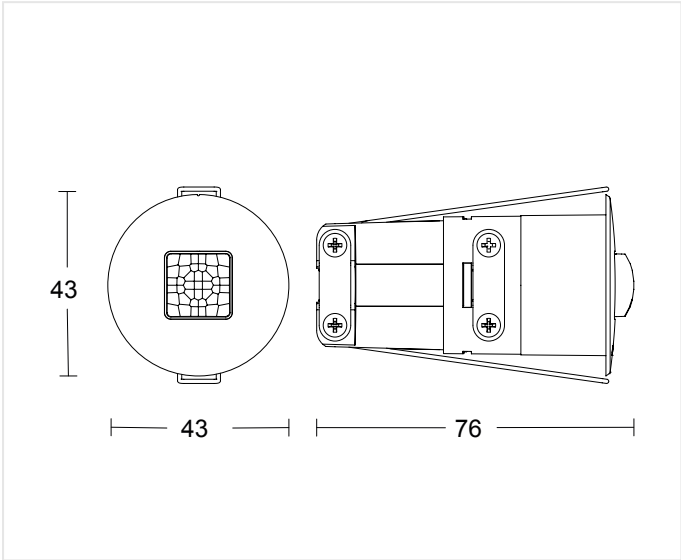

43 x 71 mm

MOUNTING HEIGHT

2,00 – 5,00 m BEREICH	2,8 m OPTIMAL	5,00 m MAX
--------------------------	------------------	---------------

IR Quattro MICRO 6m KNX - white

PRESENCE DETECTOR


EAN 4007841064129

E-Nr. 535934808

Highlights



Miniature precision infrared lens

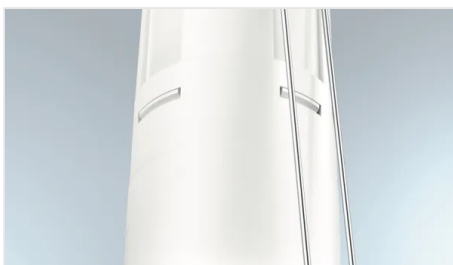

With spring clips



Can only be set using optional remote controls



Smart Remote remote control optional

IR Quattro MICRO 6m KNX - white

PRESENCE DETECTOR

EAN 4007841064129
E-Nr. 535934808

Accessories

ARTICLE NUMBER	DESCRIPTION	CATEGORY
 4007841593018	Service Fernbedienung RC6 KNX	Other
 4007841592912	Nutzer Fernbedienung RC7 KNX	Accessory

ORDERING INFORMATION

Art.-Nr.

064129

EAN

4007841064129

E-Number

535934808

Typ

IR Quattro MICRO 6m KNX - white

neva

lux

nevalux AG

Neugrütstrasse 2

8610 Uster

+41 44 508 78 78

info@nevalux.swiss