HF 3360 PF - surface, sq.

MOTION DETECTOR

EAN 4007841010546
E-Nr. 535940467

- UV-resistant plastic
- Large terminal compartment
- Optional corner wall mount bracket
- Optional remote controls

52 x 95 x 95 mm



HF 3360 PF - surface, sq.

MOTION DETECTOR

EAN 4007841010546
E-Nr. 535940467

Technical Data

IDENTIFICATION

Version	Motion detectors

DIMENSIONS

Dimensions L × W × H	52 x 95 x 95 mm

ELECTRICAL

Mains connection	220 – 240 V / 50 – 60 Hz
Power	2000 W
Fluorescent lamps ECG	1500 W
Fluorescent lamps uncompensated	1000 VA
Fluorescent lamps series-compensated	400 VA
Fluorescent lamps parallel-compensated	400 VA
Switching output 1 low-voltage halogen lamps	2000 VA
LED lamps < 2 W	100 W
LED lamps > 2 W < 8 W	300 W
LED lamps > 8 W	600 W
Capacitive load in µF	176 µF

SENSOR TECHNOLOGY

Max. mounting height	4,00 m
Sensor technology	High frequency
Transmission power	< 1 mW
HF technology	5,8 GHz
Detection	also through glass, wood and stud walls
Detection angle	360 °
Opening angle	180 °
Sneak-under protection	Yes
Segment-by-segment masking	No
Electronic scalability	Yes
Mechanical scalability	No
Radial range	Ø 8 m (50 m²)
Tangential range	Ø 8 m (50 m²)
Mounting height	2,00 – 4,00 m
Optimal mounting height	2,8 m

CONNECTIVITY

Networking	Yes
Type of networking	Master/master
Control technology	On/Off-Leuchte

LIGHTING TECHNOLOGY

Soft light start	No
Continuous light	selectable, 4h
Constant light regulation	No

SETTINGS

Twilight switch	Yes
Twilight setting	2 – 1000 lx
Time setting	5 s – 15 Min.
Base light function	No
Main light adjustable	No
Functions	Normal / test mode\nManual ON / ON-OFF
Settings via	Remote control\nPotentiometers\nSmart Remote
With remote control	No
Twilight setting teach	Yes

HOUSING & MATERIAL

Protection class (IP)	IP54
Ambient temperature	from -20 up to 50 °C
Mounting location	ceiling corner wall
Application location	Indoors
Mounting type	Surface wiring
Material	Plastic
Application room	Indoors WC / washroom function room / ancillary room multi-storey / underground car park stairwell
Colour	white
RAL colour	9003

SCOPE OF DELIVERY & WARRANTY

Manufacturer warranty	5 years
Corner wall bracket included	No


HF 3360 PF - surface, sq.

MOTION DETECTOR

EAN **4007841010546**
E-Nr. **535940467**

Illustrations

TECHNICAL DRAWINGS

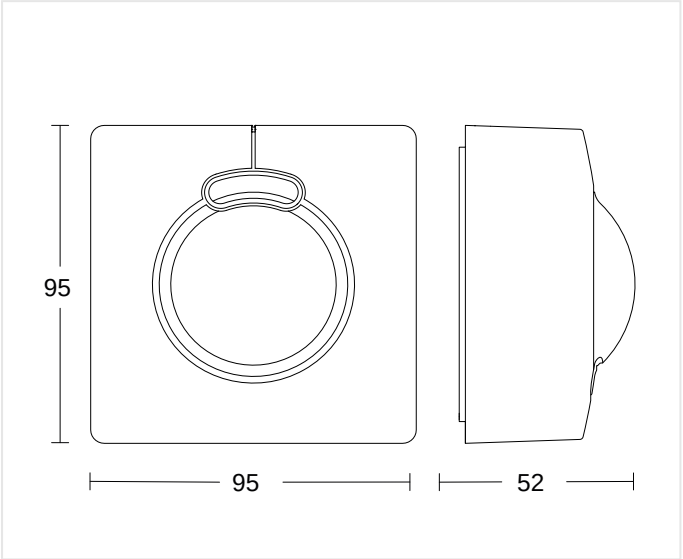

52 x 95 x 95 mm

MOUNTING HEIGHT

2,00 – 4,00 m	2,8 m	4,00 m
BEREICH	OPTIMAL	MAX


HF 3360 PF - surface, sq.

MOTION DETECTOR

EAN **4007841010546**
E-Nr. **535940467**

Wiring Diagrams

WIRING DIAGRAM 1

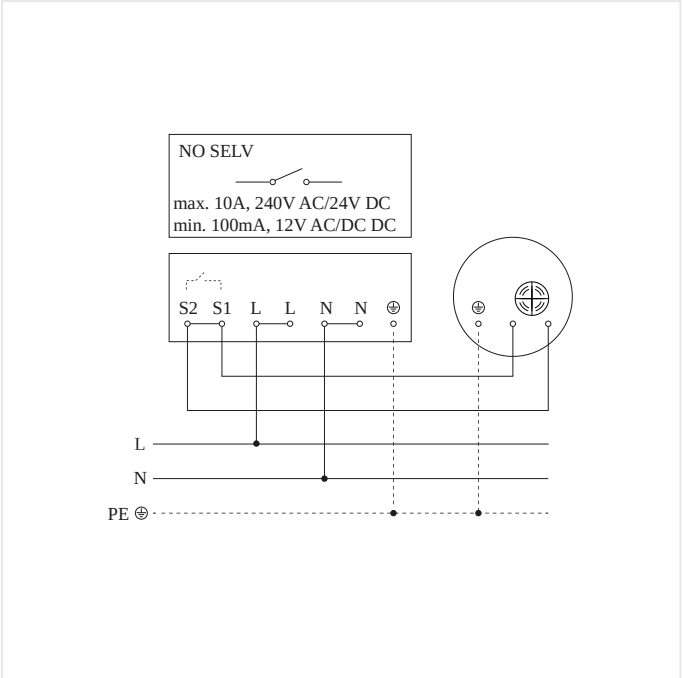

Master circuit diagram

HF 3360 PF - surface, sq.

MOTION DETECTOR

EAN 4007841010546
E-Nr. 535940467

Accessories

	ARTICLE NUMBER	DESCRIPTION	CATEGORY
	4007841009151	**Smart Remote**	Accessory
	4007841559410	**Service Fernbedienung RC8**	Accessory
	4007841035174	**Eckwandhalter 3000 weiss**	Accessory
	4007841056674	**Schwarze Blende für den HF 3360 Aufputz eckig**	Accessory
	4007841056698	**Schwarze Blende für den HF 3360 Aufputz rund**	Accessory

ORDERING INFORMATION

Art.-Nr.	4007841010546
EAN	4007841010546
E-Number	535940467
Typ	**HF 3360 PF - surface, sq.**

neva
lux

nevalux AG
Neugrütstrasse 2
8610 Uster
+41 44 508 78 78
info@nevalux.swiss