IR Quattro SLIM XS 4m KNX - square white

PRESENCE DETECTOR

EAN 4007841058500
E-Nr. 535935808

steinel

49 x 80 x 80 mm



IR Quattro SLIM XS 4m KNX - square white

PRESENCE DETECTOR

EAN **4007841058500**
E-Nr. **535935808**

Technical Data

IDENTIFICATION

Version	**Presence detector**

DIMENSIONS

Dimensions L × W × H	**49 x 80 x 80 mm**

ELECTRICAL

Supply voltage detail	**KNX bus**

SENSOR TECHNOLOGY

Max. mounting height	**4,00 m**
Sensor technology	**passive infrared**
Detection angle	**360 °**
Opening angle	**71 °**
Sneak-under protection	**Yes**
Segment-by-segment masking	**No**
Electronic scalability	**No**
Mechanical scalability	**No**
Range detail	**Retina lens and hexagonal Fresnel structure**
Radial range	**4 x 4 m (16 m²)**
Tangential range	**4 x 4 m (16 m²)**
Switching zones	**408 switching zones**
Mounting height	**2,50 – 4,00 m**
Presence range	**4 x 4 m (16 m²)**
Optimal mounting height	**2,8 m**

CONNECTIVITY

Networking	**Yes**
Type of networking	**Master/master Master/slave**
KNX functions	**Photo-cell controller Basic light level function Light level HVAC output Constant-lighting control Light output 4x Presence output Day / night function Logic gate**
With bus coupler	**Yes**
Networking via	**KNX**

LIGHTING TECHNOLOGY

Soft light start	**Yes**
Continuous light	**selectable**
Constant light regulation	**Yes**

SETTINGS

Twilight switch	**Yes**
Twilight setting	**10 – 1000 lx**
Time setting	**60 s – 255 Min.**
Base light function	**Yes**
Base light function time	**Permanently ON 1-255 min all night**
Main light adjustable	**0 - 100 %**
Settings via	**ETS software Remote control Bus Smart Remote**
With remote control	**No**
Twilight setting teach	**Yes**
Base light function in percent	**10 – 50 %**
Base light function percent from	**10 %**

HOUSING & MATERIAL

Protection class (IP)	**IP20**
Ambient temperature	**from 0 up to 40 °C**
Mounting location	**ceiling**
Application location	**Indoors**
Mounting type	**Concealed wiring**
Material	**Plastic**
Application room	**Indoors WC / washroom care room function room / ancillary room hotel room one-person office**
Colour	**white**
RAL colour	**9010**

SCOPE OF DELIVERY & WARRANTY

Manufacturer warranty	**5 years**
Corner wall bracket included	**No**


IR Quattro SLIM XS 4m KNX - square white

PRESENCE DETECTOR

EAN **4007841058500**
E-Nr. **535935808**

Illustrations

TECHNICAL DRAWINGS

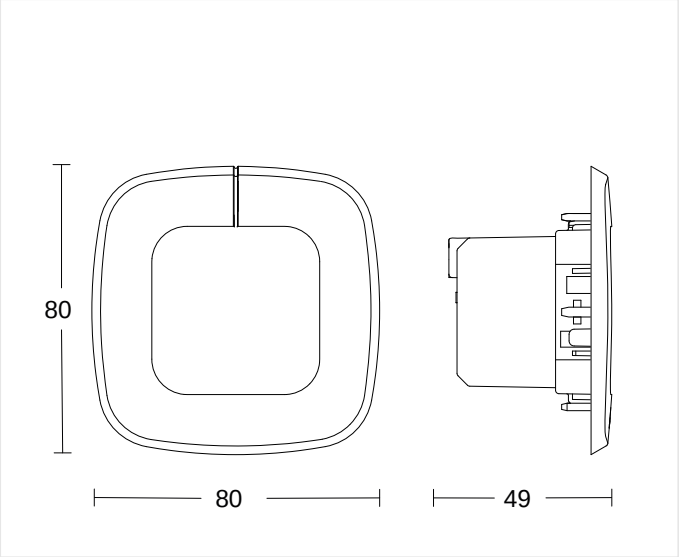

49 x 80 x 80 mm

MOUNTING HEIGHT


2,50 – 4,00 m	2,8 m	4,00 m
BEREICH	OPTIMAL	MAX

IR Quattro SLIM XS 4m KNX - square white

PRESENCE DETECTOR

EAN 4007841058500
E-Nr. 535935808

Highlights

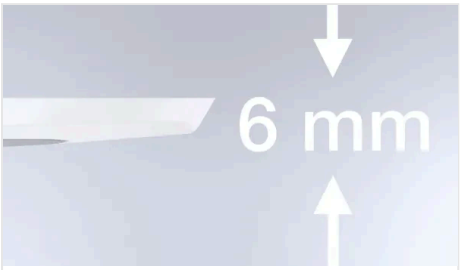

Extremely slim overall height



High-quality retina lens



Can only be set using optional remote controls



Smart Remote remote control optional

IR Quattro SLIM XS 4m KNX - square white

PRESENCE DETECTOR

EAN 4007841058500
E-Nr. 535935808

Accessories

	ARTICLE NUMBER	DESCRIPTION	CATEGORY
	4007841009151	**Smart Remote**	Accessory
	4007841593018	**Service Fernbedienung RC6 KNX**	Accessory
	4007841592912	**Nutzer Fernbedienung RC7 KNX**	Accessory

ORDERING INFORMATION

Art.-Nr.	058500
EAN	4007841058500
E-Number	535935808
Typ	**IR Quattro SLIM XS 4m KNX - square white**

nevalux AG
Neugrütstrasse 2
8610 Uster
+41 44 508 78 78
info@nevalux.swiss