

L 1 S black

E27 SENSOR-SWITCHED OUTDOOR LIGHT

neva
lux

EAN 4007841650612

E-Nr. 924323009

- Outdoor light with motion detector and house number sticker
- Made of UV-resistant, impact-resistant material according to IK07 for a long service life
- Automatic light thanks to 180 ° Infrared sensor with up to 10 m detection of movement
- Detection area and range can be individually limited using the cover stickers supplied and the swivelling sensor (90° vertical)
- With E27 socket for incandescent lamps with max. 60 W as well as for energy-saving lamps or LED bulbs with max. 20 W (not included in the scope of delivery)
- Incl. house number arch and mounting accessories - plastic-free packaging

● steinel

120 x 110 x 255 mm



L 1 S black

E27 SENSOR-SWITCHED OUTDOOR LIGHT

EAN 4007841650612
E-Nr. 924323009

Technical Data

DIMENSIONS		CONNECTIVITY		Ambient temperature	
Dimensions L × W × H	120 x 110 x 255 mm	Networking	No	from -20 up to 40 °C	
ELECTRICAL		Slave mode adjustable	No	Housing material	Plastic
Mains connection	230 – 240 V / 50 Hz	LIGHTING TECHNOLOGY		Cover material	Plastic, opal
Power	60 W	With illuminant	No	Cover material (scope of delivery)	sticker
Own consumption	0,55 W	Illuminant	All-purpose lamp	Mounting location	wall
SENSOR TECHNOLOGY		Base	E27	Application location	Outdoors
Max. mounting height	3,00 m	Soft light start	No	Mounting type	Surface wiring
Sensor technology	passive infrared	SETTINGS		Application room	all round the building courtyard & driveway front door outdoors
With motion detector	Yes	Twilight switch	Yes	Colour	black
Detection angle	180 °	Twilight setting	2 – 2000 lx	SCOPE OF DELIVERY & WARRANTY	
Sneak-under protection	Yes	Time setting	8 s – 35 Min.	Manufacturer warranty	3 years
Segment-by-segment masking	Yes	Base light function	No	House number sheet included	Yes
Electronic scalability	No	Settings via	Potentiometers	CERTIFICATES & EPREL	
Mechanical scalability	No	With remote control	No	EPREL category	Surrounded product with separate light source (e.g. E27)
		HOUSING & MATERIAL			
Radial range	r = 3 m (14 m²)	Impact resistance	IK07		
Tangential range	r = 10 m (157 m²)	Protection class (IP)	IP44		
Mounting height	1,80 – 3,00 m	Protection class	II		
Optimal mounting height	2 m				

L 1 S black


E27 SENSOR-SWITCHED OUTDOOR LIGHT

EAN 4007841650612

E-Nr. 924323009

Illustrations

TECHNICAL DRAWINGS

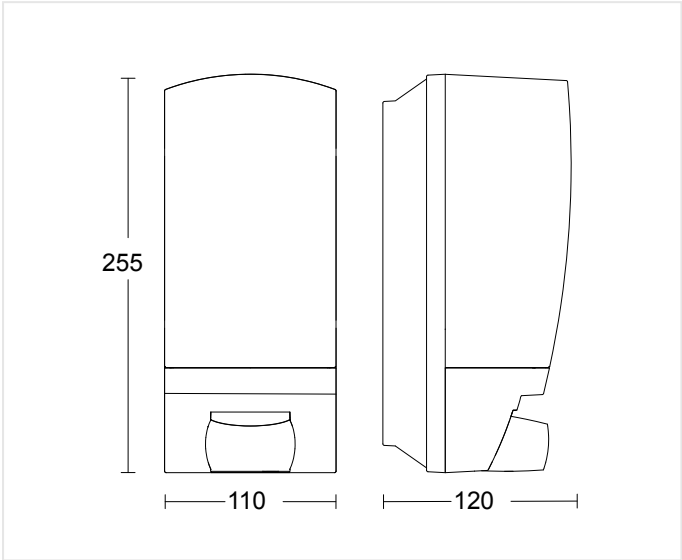

120 x 110 x 255 mm

MOUNTING HEIGHT

1,80 – 3,00 m BEREICH	2 m OPTIMAL	3,00 m MAX
--------------------------	----------------	---------------

L 1 S black


E27 SENSOR-SWITCHED OUTDOOR LIGHT

EAN 4007841650612

E-Nr. 924323009

Wiring Diagrams

WIRING DIAGRAM 1



Circuit diagram

L 1 S black

E27 SENSOR-SWITCHED OUTDOOR LIGHT

EAN 4007841650612

E-Nr. 924323009


Highlights



Including sheet of self-adhesive house numbers



Impact-resistant material rated to IK07

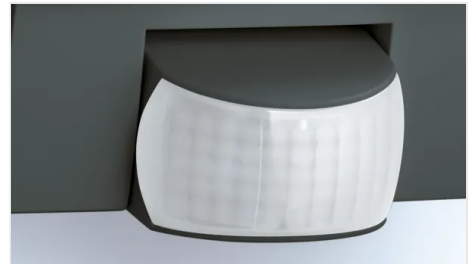

UV-resistant plastic

L 1 S black

E27 SENSOR-SWITCHED OUTDOOR LIGHT

EAN **4007841650612**
E-Nr. **924323009**

Accessories

ORDERING INFORMATION

Art.-Nr.	650612
EAN	4007841650612
E-Number	924323009
Typ	L 1 S black

neva
lux

nevalux AG
Neugrütstrasse 2
8610 Uster
+41 44 508 78 78
info@nevalux.swiss