

GL 85 C 600 without motion detector

neva
lux**LED OUTDOOR LIGHT WITHOUT SENSOR**

EAN 4007841078652

E-Nr. 941775029

 **steinel**

136 x 136 x 600 mm



GL 85 C 600 without motion detector

LED OUTDOOR LIGHT WITHOUT SENSOR

EAN 4007841078652

E-Nr. 941775029

Technical Data

DIMENSIONS		With illuminant	Yes, STEINEL LED system	Protection class (IP)	IP44
Dimensions L x W x H	136 x 136 x 600 mm	Illuminant	LED cannot be replaced	Protection class	I
ELECTRICAL		Base	without	Ambient temperature	from -20 up to 40 °C
Mains connection	220 – 240 V / 50 – 60 Hz	Soft light start	Yes	Housing material	Aluminium
Power	9 W	LIFETIME		Cover material	Plastic, opal
SENSOR TECHNOLOGY		LED lifetime L70B50 25°C	> 60000 h	Mounting location	Stand mounted
With motion detector	No	Luminous flux decline per LM80	L70B50	Application location	Outdoors
CONNECTIVITY		SETTINGS		Mounting type	Other
Networking	Yes	Twilight switch	Yes	Material	Aluminium
Type of networking	Master/slave	Main light adjustable	10 - 100 %	Application room	garden outdoors
Networking via	Bluetooth Mesh	Functions	Neighbouring group function Motions sensor	SCOPE OF DELIVERY & WARRANTY	
LIGHTING TECHNOLOGY		Settings via	App Smartphone Bluetooth Mesh	Manufacturer warranty	5 years
Measured luminous flux 360°	719 lm	With remote control	No	House number sheet included	No
Colour temperature	3000 K	Twilight setting teach	Yes	CERTIFICATES & EPREL	
LED colour deviation	SDCM3	HOUSING & MATERIAL		EPREL category	Surrounded product with integrated light source
Colour rendering index	80-89	Impact resistance	IK03		

GL 85 C 600 without motion detector


LED OUTDOOR LIGHT WITHOUT SENSOR

EAN 4007841078652

E-Nr. 941775029

Illustrations

TECHNICAL DRAWINGS

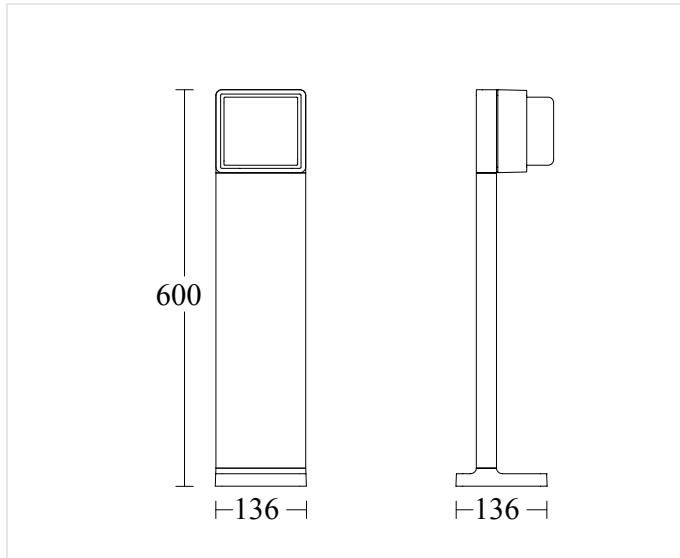

136 x 136 x 600 mm

GL 85 C 600 without motion detector


EAN 4007841078652

LED OUTDOOR LIGHT WITHOUT SENSOR

E-Nr. 941775029


Wiring Diagrams

WIRING DIAGRAM 1

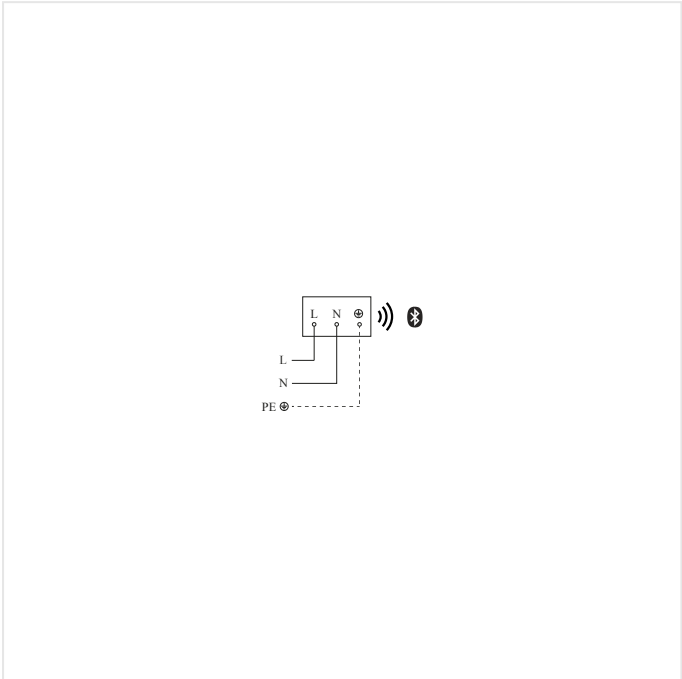

Circuit diagram Bluetooth

WIRING DIAGRAM 2

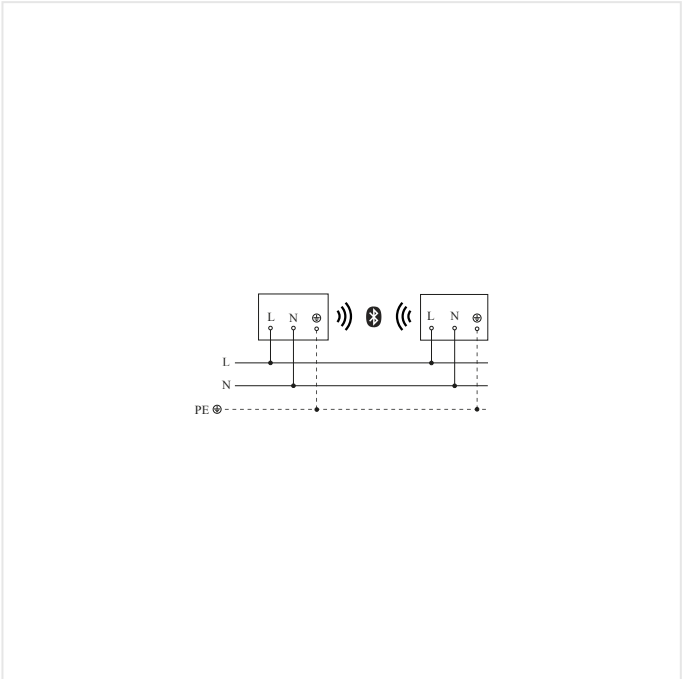

Circuit diagram Bluetooth

GL 85 C 600 without motion detector

LED OUTDOOR LIGHT WITHOUT SENSOR

EAN 4007841078652

E-Nr. 941775029

Highlights



Including STEINEL LED system



Intelligent soft light start



Optional basic lighting level 10 - 100 %
(only with bluetooth sensor product)



High-quality aluminium

GL 85 C 600 without motion detector

LED OUTDOOR LIGHT WITHOUT SENSOR

EAN 4007841078652
E-Nr. 941775029

Accessories

ARTICLE NUMBER	DESCRIPTION	CATEGORY
 4007841078843	Ersatz-Fuss GL 85 anthrazit	Spare Part
 4007841078850	Ersatz-Profil GL 85 600	Spare Part
 4007841084653	Funktaster PB2-Bluetooth	System components
 4007841084660	Funktaster PB4-Bluetooth	System components
 221972	GL 85 M-Set SV	Mounting kit

ORDERING INFORMATION

Art.-Nr.

078652

EAN

4007841078652

E-Number

941775029

Typ

GL 85 C 600 without motion detector

neva

lux

nevalux AG

Neugrütstrasse 2

8610 Uster

+41 44 508 78 78

info@nevalux.swiss