

IR Quattro 8m COM1 - in-ceiling installation

neva
lux**PRESENCE DETECTOR**

EAN 4007841079345

E-Nr. 535931610

 **steinel**

113 x 120 x 120 mm



IR Quattro 8m COM1 - in-ceiling installation

PRESENCE DETECTOR

EAN 4007841079345

E-Nr. 535931610

Technical Data

IDENTIFICATION	
Version	Presence detector
DIMENSIONS	
Dimensions L x W x H	113 x 120 x 120 mm
ELECTRICAL	
Mains connection	230 V / 50 – 60 Hz
SENSOR TECHNOLOGY	
Max. mounting height	8,00 m
Sensor technology	passive infrared
Detection angle	360 °
Opening angle	100 °
Sneak-under protection	Yes
Segment-by-segment masking	No
Electronic scalability	No
Mechanical scalability	Yes
Radial range	5 x 5 m (25 m²)
Tangential range	7 x 7 m (49 m²)
Detection planes	13
Switching zones	1760 switching zones
Mounting height	2,50 – 8,00 m

Presence range	4 x 4 m (16 m²)
Optimal mounting height	2,8 m
CONNECTIVITY	
Networking	Yes
Type of networking	Master/master Master/slave
Networking via	Cable
Networking quantity	max. 10 sensors
LIGHTING TECHNOLOGY	
Soft light start	No
Continuous light	selectable
Constant light regulation	No
SETTINGS	
Twilight switch	Yes
Twilight setting	10 – 1000 lx
Time setting	30 s – 30 Min.
Base light function	No
Main light adjustable	No
Functions	Normal / test mode Semi-/fully automatic Pushbutton / switch mode Manual ON / ON-OFF

Settings via	Remote control DIP switches Potentiometers Smart Remote
With remote control	No
Twilight setting teach	Yes
HOUSING & MATERIAL	
Protection class (IP)	IP20
Ambient temperature	from 0 up to 40 °C
Mounting location	ceiling
Application location	Indoors
Mounting type	In-ceiling installation
Material	Plastic
Application room	Indoors changing room conference room / meeting room duty room function room / ancillary room kitchenette one-person office recreation room
Colour	white
RAL colour	9010
SCOPE OF DELIVERY & WARRANTY	
Manufacturer warranty	5 years
Corner wall bracket included	No

IR Quattro 8m COM1 - in-ceiling installation


PRESENCE DETECTOR

EAN 4007841079345

E-Nr. 535931610

Illustrations

TECHNICAL DRAWINGS

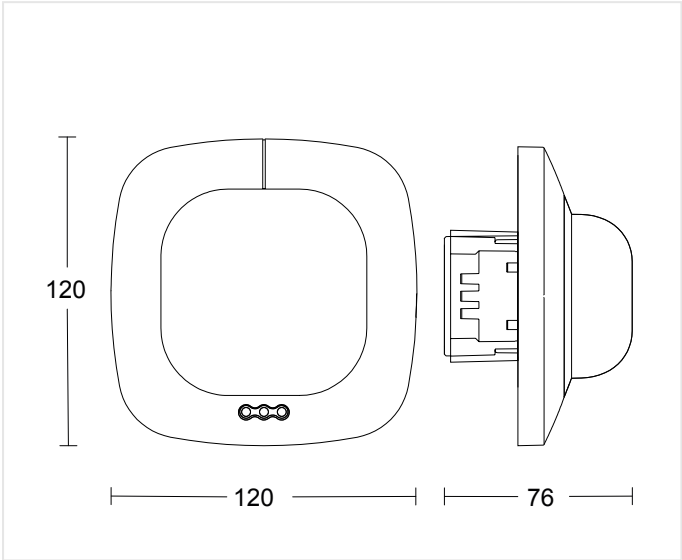

113 x 120 x 120 mm

MOUNTING HEIGHT

2,50 – 8,00 m BEREICH	2,8 m OPTIMAL	8,00 m MAX
--------------------------	------------------	---------------

IR Quattro 8m COM1 - in-ceiling installation


EAN 4007841079345

E-Nr. 535931610

PRESENCE DETECTOR


Wiring Diagrams

WIRING DIAGRAM 1

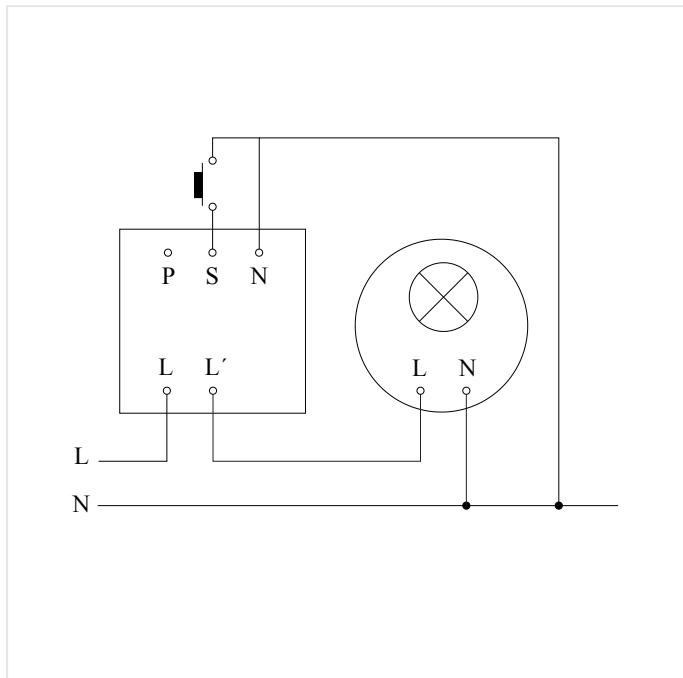

Master circuit diagram

WIRING DIAGRAM 2

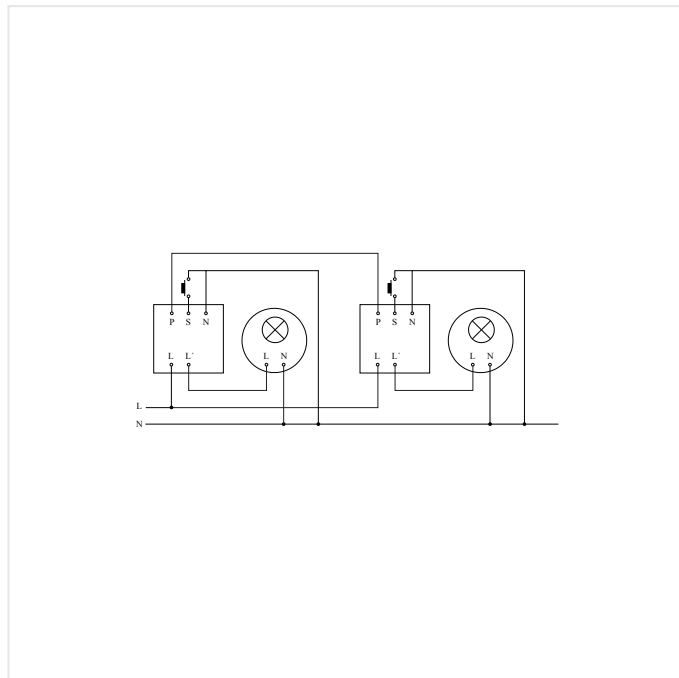

Master/master interconnection circuit diagram

IR Quattro 8m COM1 - in-ceiling installation

PRESENCE DETECTOR

EAN 4007841079345

E-Nr. 535931610

Highlights



Optional remote controls



Optional surface-mounting adapter



Optional guard cage

IR Quattro 8m COM1 - in-ceiling installation

PRESENCE DETECTOR

EAN 4007841079345
E-Nr. 535931610

Accessories

ARTICLE NUMBER	DESCRIPTION	CATEGORY
 4007841003036	Control PRO Schutzkorb	Accessory
 4007841009151	Smart Remote	Accessory
 4007841559410	Service Fernbedienung RC8	Accessory

ORDERING INFORMATION

Art.-Nr.

079345

EAN

4007841079345

E-Number

535931610

Typ

IR Quattro 8m COM1 - in-ceiling installation

nevalux

nevalux AG
Neugrütstrasse 2
8610 Uster
+41 44 508 78 78
info@nevalux.swiss