

RS PRO DL 200 Multipack (20 pcs.) with motion detector & Bluetooth

neva
lux**SENSOR-SWITCHED LED INDOOR LIGHT**

EAN 4007841087265

E-Nr. 941349489

- Sensor downlights in multipacks of 20 pcs. for ceiling installation
- Downlight with invisible 360° high-frequency sensor and Ø 7 m range
- Ideal for corridors, functional rooms or washrooms due to IP54 degree of protection on the room side
- Light colour adjustable via controller on downlight: 3000 K (1996 lm) / 4000 K (2170 lm) / 5700 K (2088 lm)
- WAGO clamp terminals for 3-pole through-wiring
- For ceiling cut-outs of Ø190 - 220 mm, optional mounting adapter available
- Bluetooth Mesh technology for minimal installation and maintenance effort as well as cross-range networking
- Products in multipacks come without outer packaging and are therefore not suitable for individual sale.

 **steinel**

230 x 73 mm



RS PRO DL 200 Multipack (20 pcs.) with motion detector & Bluetooth

SENSOR-SWITCHED LED INDOOR LIGHT

EAN 4007841087265

E-Nr. 941349489

Technical Data

DIMENSIONS			With illuminant			Base light function percent from		
Dimensions Ø x H			230 x 73 mm			0 %		
ELECTRICAL			Illuminant			LED cannot be replaced		
Power			17,3 W			LED cooling system		
Own consumption			0,5 W			Passive Thermo Control		
SENSOR TECHNOLOGY			Soft light start			Yes		
Max. mounting height			4,00 m			HOUSING & MATERIAL		
HF technology			5,8 GHz			Impact resistance		
With motion detector			Yes			IK05		
Detection angle			360 °			Protection class (IP)		
Radial range			Ø 7 m (38 m²)			IP20		
Tangential range			Ø 7 m (38 m²)			Protection class		
Mounting height			2 – 4 m			II		
Optimal mounting height			2,8 m			Ambient temperature		
CONNECTIVITY			Functions			from -20 up to 20 °C		
Networking			Yes			Mounting location		
Type of networking			Master/master			ceiling		
Networking via			Bluetooth Mesh			Application location		
Slave mode adjustable			Yes			Indoors		
LIGHTING TECHNOLOGY			Settings via			Mounting type		
Colour temperature			App Bluetooth Mesh Smartphone			In-ceiling installation		
LED colour deviation			SDCM3			Material		
			With remote control			Plastic		
			Base light function in percent			Application room		
			0 – 100 %			Indoors WC / washroom changing room corridor / aisle function room / ancillary room kitchenette reception / lobby stairwell		
						Colour		
						white		
						SCOPE OF DELIVERY & WARRANTY		
						Manufacturer warranty		
						5 years		
						House number sheet included		
						No		
						CERTIFICATES & EPREL		
						EPREL category		
						Surrounded product with integrated light source		

RS PRO DL 200 Multipack (20 pcs.) with motion detector & Bluetooth

EAN 4007841087265
E-Nr. 941349489

SENSOR-SWITCHED LED INDOOR LIGHT

Illustrations

MOUNTING HEIGHT

2 – 4 m BEREICH	2,8 m OPTIMAL	4,00 m MAX
--------------------	------------------	---------------


RS PRO DL 200 Multipack (20 pcs.) with motion detector & Bluetooth

EAN 4007841087265
E-Nr. 941349489

SENSOR-SWITCHED LED INDOOR LIGHT


Wiring Diagrams

WIRING DIAGRAM 1

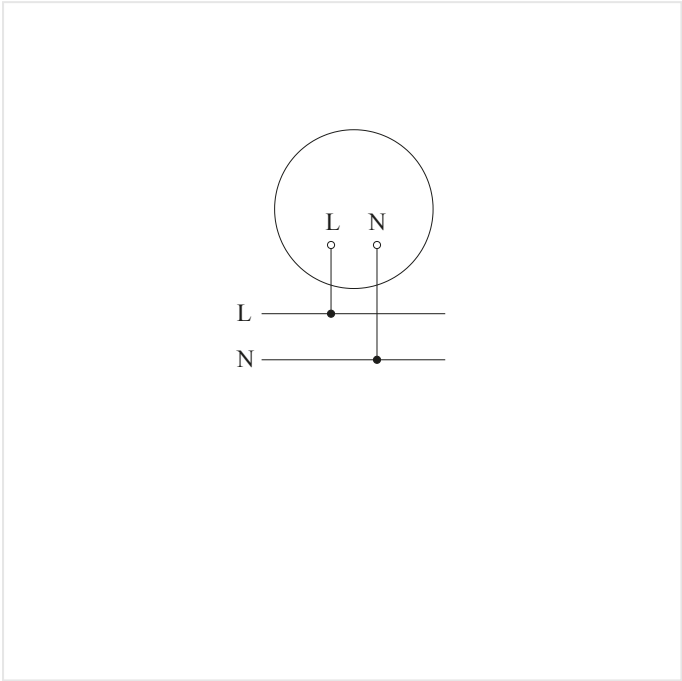

Master circuit diagram

WIRING DIAGRAM 2

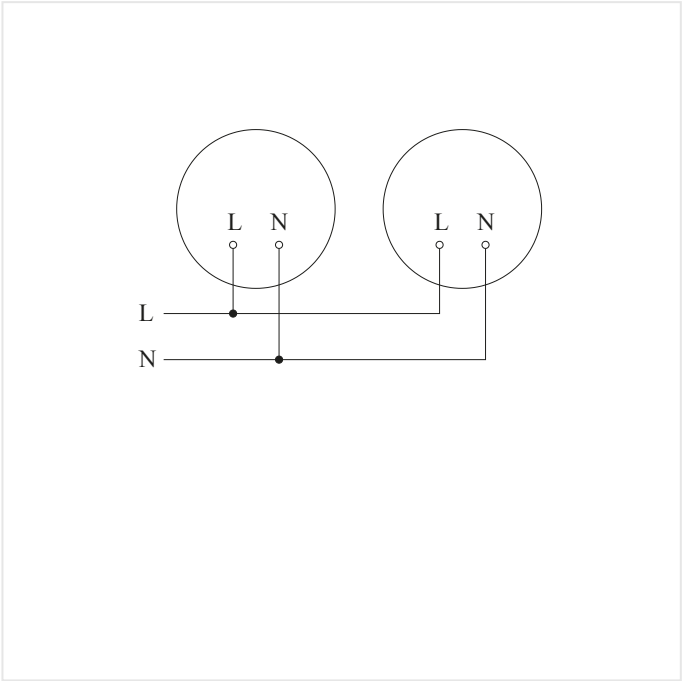

Master/master bluetooth interconnection circuit diagram


RS PRO DL 200 Multipack (20 pcs.) with motion detector & Bluetooth

EAN 4007841087265

E-Nr. 941349489

SENSOR-SWITCHED LED INDOOR LIGHT

Highlights

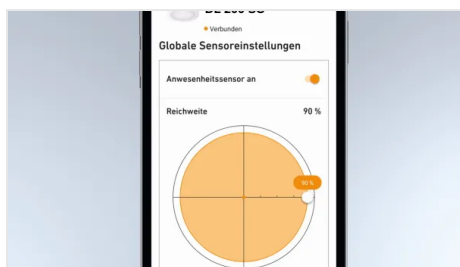

Interconnectable and adjustable via Bluetooth



Colour temperature change



WAGO terminal

RS PRO DL 200 Multipack (20 pcs.) with motion detector & Bluetooth

EAN 4007841087265
E-Nr. 941349489

SENSOR-SWITCHED LED INDOOR LIGHT

Accessories

ORDERING INFORMATION	
Art.-Nr.	087265
EAN	4007841087265
E-Number	941349489
Typ	RS PRO DL 200 Multipack (20 pcs.) with motion detector & Bluetooth
neva lux nevalux AG Neugrütstrasse 2 8610 Uster +41 44 508 78 78 info@nevalux.swiss	