XLED PRO ONE Max without motion detector - white

LED FLOODLIGHT WITHOUT SENSOR

EAN 4007841086824

- Floodlight redefined. The XLED PRO ONE floodlight without sensor, which can be swivelled vertically through 180° and comes in a stylish aluminium housing, ensures daylight illumination of large areas with warm white 3000 K and 6093 lm at 49,4 W. Suitable for manual switch operation and for cable-based networking in conjunction with a sensor version. With optional surface-mounted adapter. Available in white or anthracite. 5-year guarantee.

202 x 259 x 226 mm



XLED PRO ONE Max without motion detector - white

LED FLOODLIGHT WITHOUT SENSOR

EAN **4007841086824**

Technical Data

DIMENSIONS

Dimensions L × W × H	**202 x 259 x 226 mm**

ELECTRICAL

Mains connection	**220 – 240 V / 50 – 60 Hz**
Power	**49,4 W**

SENSOR TECHNOLOGY

With motion detector	**No**

CONNECTIVITY

Networking	**Yes**
Type of networking	**Master/slave**
Control technology	**On/Off-Leuchte**

LIGHTING TECHNOLOGY

Measured luminous flux 360°	**6093 lm**
Colour temperature	**3000 K**
LED colour deviation	**SDCM3**
Colour rendering index	**80-89**
With illuminant	**Yes, STEINEL LED system**
Illuminant	**LED cannot be replaced**
Base	**without**
LED cooling system	**Passive Thermo Control**

LIFETIME

LED lifetime L70B50 25°C	**> 36000 h**

SETTINGS

Twilight switch	**No**
Base light function	**No**
Main light adjustable	**No**
Functions	**Relay output**
Twilight setting teach	**No**

HOUSING & MATERIAL

Impact resistance	**IK03**
Protection class (IP)	**IP44**
Protection class	**I**
Ambient temperature	**-20 – 40 °C**
Housing material	**Aluminium**
Cover material	**Glass transparent**
Cover material (scope of delivery)	**shrouds**
Mounting location	**ceiling wall**
Application location	**Outdoors**
Mounting type	**Surface wiring**
Application room	**all round the building courtyard & driveway front door garden outdoors**
Colour	**white**

SCOPE OF DELIVERY & WARRANTY

Manufacturer warranty	**5 years**
Corner wall bracket included	**No**

CERTIFICATES & EPREL

EPREL category	**Light source**


XLED PRO ONE Max without motion detector - white

EAN 4007841086824

LED FLOODLIGHT WITHOUT SENSOR

Illustrations

TECHNICAL DRAWINGS

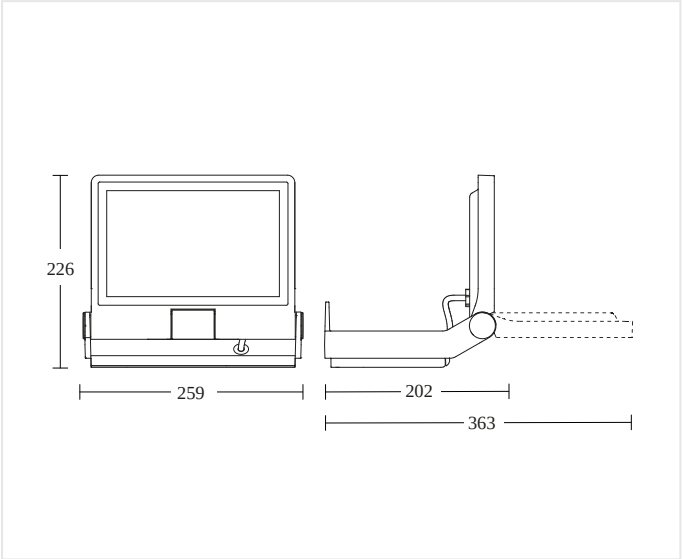

202 x 259 x 226 mm


XLED PRO ONE Max without motion detector - white

EAN 4007841086824

LED FLOODLIGHT WITHOUT SENSOR


Wiring Diagrams

WIRING DIAGRAM 1

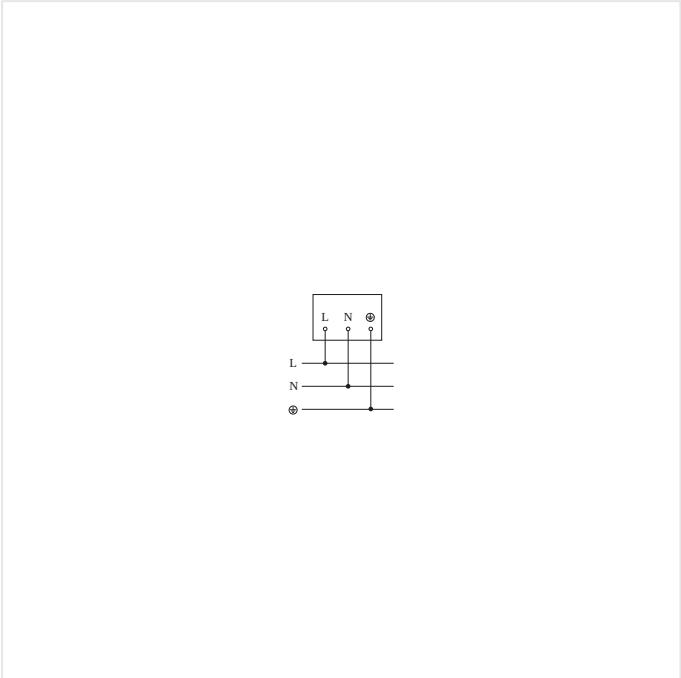

Slave circuit diagram

WIRING DIAGRAM 2

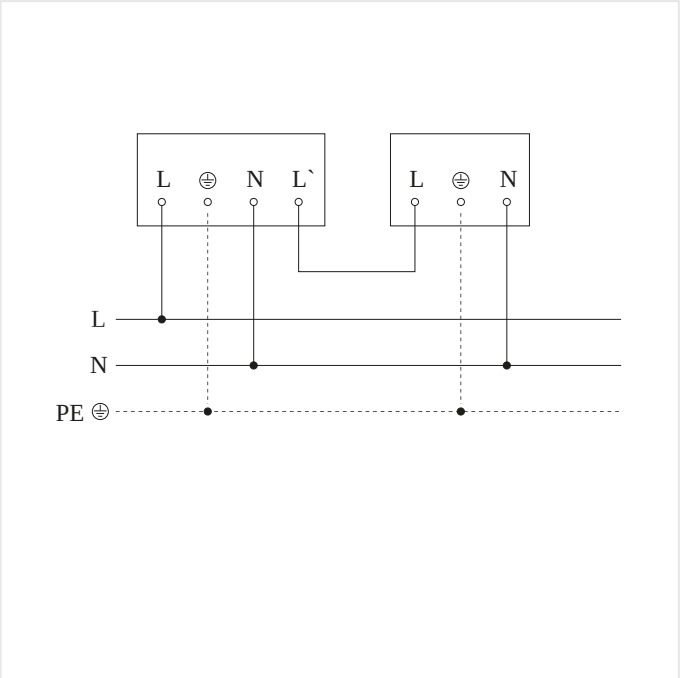

Master/slave interconnection circuit diagram

XLED PRO ONE Max without motion detector - white

EAN 4007841086824

LED FLOODLIGHT WITHOUT SENSOR

Accessories

	ARTICLE NUMBER	DESCRIPTION	CATEGORY
	4007841080983	**Aufputz-Adapter XLED PRO ONE Plus + Max anthrazit**	Accessory
	4007841079000	**RC 12**	Accessory

ORDERING INFORMATION

Art.-Nr.	4007841086824
EAN	4007841086824
Typ	**XLED PRO ONE Max without motion detector - white**

nevalux AG
Neugrütstrasse 2
8610 Uster
+41 44 508 78 78
info@nevalux.swiss