

IR Quattro SLIM XS 4m KNX - square white

neva
lux**PRESENCE DETECTOR**

EAN 4007841058500

E-Nr. 535935808

 **steinel**

49 x 80 x 80 mm



IR Quattro SLIM XS 4m KNX - square white

PRESENCE DETECTOR

EAN 4007841058500
E-Nr. 535935808

Technical Data

IDENTIFICATION		Optimal mounting height		2,8 m	Settings via	ETS software Remote control
Version	Presence detector	CONNECTIVITY			Bus Smart Remote	
DIMENSIONS		Networking		Yes	With remote control	No
Dimensions L x W x H	49 x 80 x 80 mm	Type of networking		Master/master Master/slave	Twilight setting teach	Yes
ELECTRICAL		Networking via		KNX bus	Base light function in percent	10 – 50 %
Supply voltage detail	KNX bus	KNX functions		Photo-cell controller Basic light level function Light level HVAC output Constant-lighting control Light output 4x Presence output Day / night function Logic gate	Base light function percent from	10 %
SENSOR TECHNOLOGY		With bus coupler		Yes	HOUSING & MATERIAL	
Max. mounting height	4,00 m	LIGHTING TECHNOLOGY			Protection class (IP)	IP20
Sensor technology	passive infrared	Soft light start		Yes	Ambient temperature	from 0 up to 40 °C
Detection angle	360 °	Continuous light		selectable	Mounting location	ceiling
Opening angle	71 °	Constant light regulation		Yes	Application location	Indoors
Sneak-under protection	Yes	SETTINGS			Mounting type	Concealed wiring
Segment-by-segment masking	No	Twilight switch		Yes	Material	Plastic
Electronic scalability	No	Twilight setting		10 – 1000 lx	Application room	Indoors WC / washroom care room function room / ancillary room hotel room one-person office
Mechanical scalability	No	Time setting		60 s – 255 Min.	Colour	white
Range detail	Retina lens and hexagonal Fresnel structure	Base light function		Yes	RAL colour	9010
Radial range	4 x 4 m (16 m²)	Base light function time		Permanently ON 1-255 min all night	SCOPE OF DELIVERY & WARRANTY	
Tangential range	4 x 4 m (16 m²)	Main light adjustable		0 - 100 %	Manufacturer warranty	5 years
Switching zones	408 switching zones				Corner wall bracket included	No
Mounting height	2,50 – 4,00 m					
Presence range	4 x 4 m (16 m²)					

IR Quattro SLIM XS 4m KNX - square white


PRESENCE DETECTOR

EAN 4007841058500

E-Nr. 535935808

Illustrations

TECHNICAL DRAWINGS

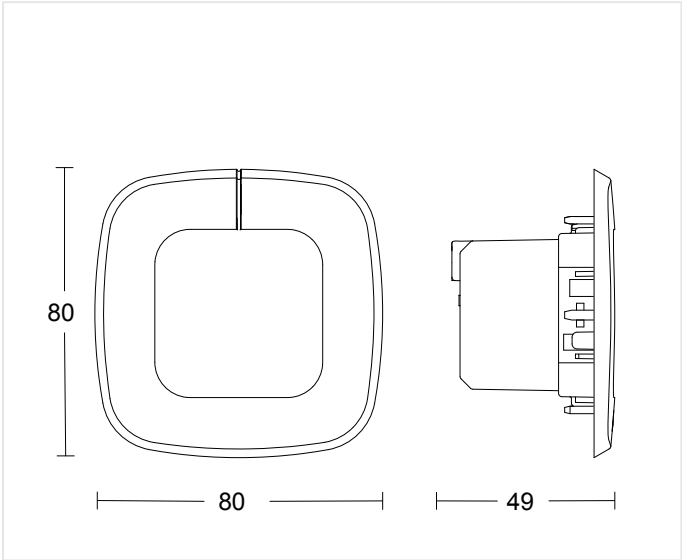

49 x 80 x 80 mm

MOUNTING HEIGHT

2,50 – 4,00 m BEREICH	2,8 m OPTIMAL	4,00 m MAX
--------------------------	------------------	---------------


IR Quattro SLIM XS 4m KNX - square white

PRESENCE DETECTOR

EAN 4007841058500

E-Nr. 535935808

Highlights

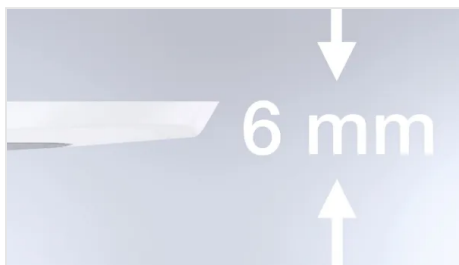

Extremely slim overall height



High-quality retina lens



Can only be set using optional remote controls



Smart Remote remote control optional

IR Quattro SLIM XS 4m KNX - square white

PRESENCE DETECTOR

EAN 4007841058500
E-Nr. 535935808

Accessories

ARTICLE NUMBER	DESCRIPTION	CATEGORY
 4007841009151	Smart Remote	Accessory
 4007841593018	Service Fernbedienung RC6 KNX	Other
 4007841592912	Nutzer Fernbedienung RC7 KNX	Accessory

ORDERING INFORMATION

Art.-Nr.

058500

EAN

4007841058500

E-Number

535935808

Typ

IR Quattro SLIM XS 4m KNX - square white

nevalux

nevalux AG
Neugrütstrasse 2
8610 Uster
+41 44 508 78 78
info@nevalux.swiss