IS 2140 ECO white

MOTION DETECTOR

EAN 4007841034672

83 x 99 x 86 mm



IS 2140 ECO white

MOTION DETECTOR

EAN **4007841034672**

Technical Data

IDENTIFICATION

Version	**Motion detectors**

DIMENSIONS

Dimensions L × W × H	**83 x 99 x 86 mm**

ELECTRICAL

Mains connection	**230 – 240 V / 50 – 60 Hz**
Switching output 1 resistive	**2000 W**
Fluorescent lamps ECG	**250 W**
Fluorescent lamps uncompensated	**500 VA**
Fluorescent lamps series-compensated	**1000 VA**
Fluorescent lamps parallel-compensated	**500 VA**
Switching output 1 low-voltage halogen lamps	**1000 VA**
LED lamps < 2 W	**100 W**
LED lamps > 2 W < 8 W	**125 W**
LED lamps > 8 W	**250 W**

SENSOR TECHNOLOGY

Max. mounting height	**3,00 m**
Sensor technology	**passive infrared**
Detection angle	**140 °**
Sneak-under protection	**Yes**
Segment-by-segment masking	**Yes**
Electronic scalability	**No**
Mechanical scalability	**No**
Radial range	**r = 3 m (11 m²)**
Tangential range	**r = 14 m (239 m²)**
Mounting height	**1,80 – 3,00 m**
Optimal mounting height	**2 m**

CONNECTIVITY

Control technology	**On/Off-Leuchte**

LIGHTING TECHNOLOGY

Soft light start	**No**
Continuous light	**selectable**

SETTINGS

Twilight setting	**2 – 2000 lx**
Time setting	**8 s – 35 Min.**
Base light function	**No**
Main light adjustable	**No**
Settings via	**Potentiometers**

HOUSING & MATERIAL

Protection class (IP)	**IP54**
Ambient temperature	**from -20 up to 50 °C**
Mounting location	**wall**
Application location	**Indoors Outdoors**
Mounting type	**Surface wiring**
Material	**Plastic**
Application room	**all round the building courtyard & driveway front door outdoors terrace / balcony**
Colour	**white**
RAL colour	**9010**

SCOPE OF DELIVERY & WARRANTY

Manufacturer warranty	**5 years**

CERTIFICATES & EPREL

Certificates	**VDE**


IS 2140 ECO white

MOTION DETECTOR

EAN 4007841034672

Illustrations

TECHNICAL DRAWINGS

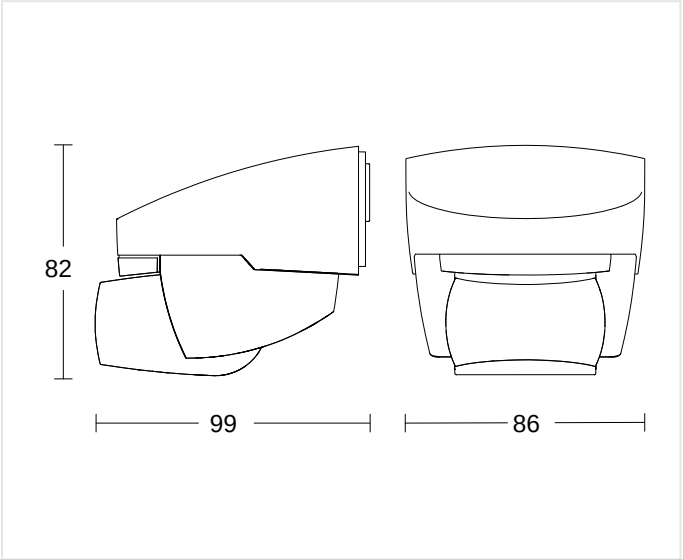

83 x 99 x 86 mm

MOUNTING HEIGHT

1,80 – 3,00 m	2 m	3,00 m
BEREICH	OPTIMAL	MAX


IS 2140 ECO white

MOTION DETECTOR

EAN 4007841034672


Wiring Diagrams

WIRING DIAGRAM 1

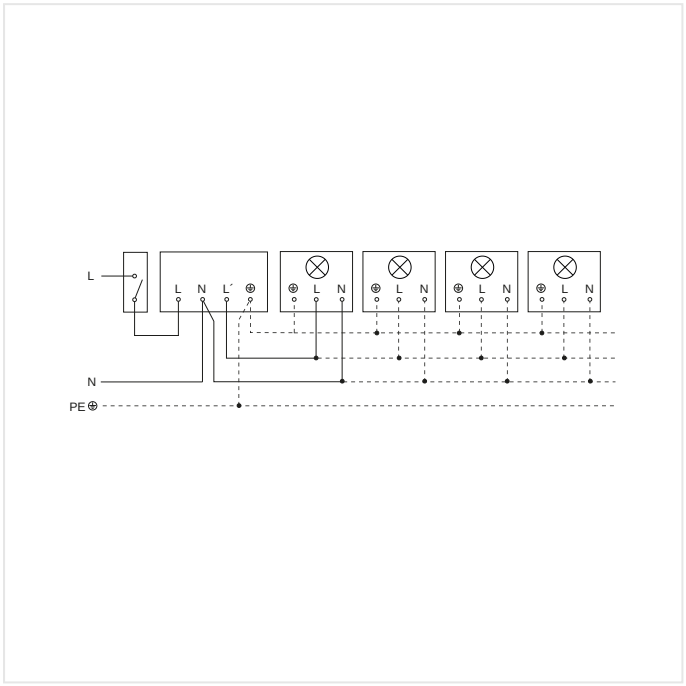

Light without neutral conductor

WIRING DIAGRAM 2

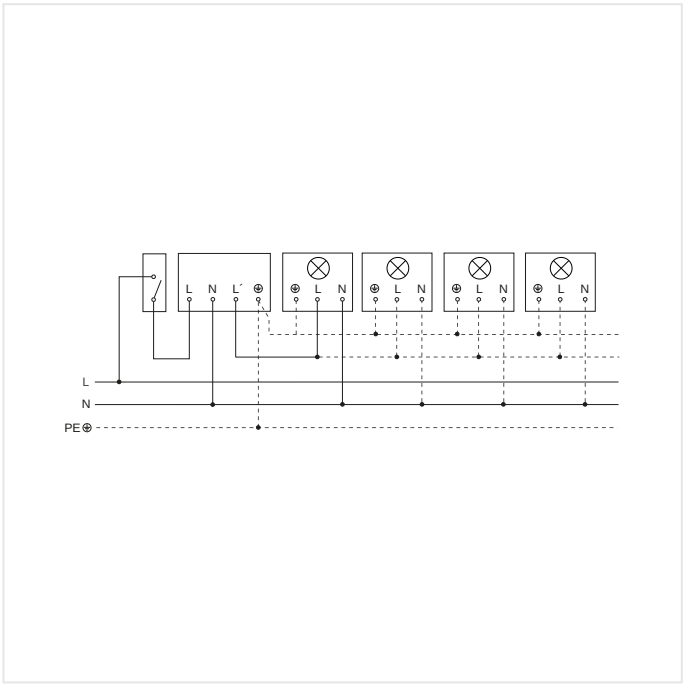

Light with neutral conductor

IS 2140 ECO white

MOTION DETECTOR

EAN 4007841034672

Highlights



UV-resistant plastic



Optional corner wall mount bracket

IS 2140 ECO white

MOTION DETECTOR

EAN **4007841034672**

Accessories

ORDERING INFORMATION

Art.-Nr.	034672
EAN	4007841034672
Typ	**IS 2140 ECO white**

nevalux AG
Neugrütstrasse 2
8610 Uster
+41 44 508 78 78
info@nevalux.swiss