

RS 10 S

E27 SENSOR-SWITCHED INDOOR LIGHT

neva
lux

EAN 4007841730512

E-Nr. 920622009

● steinel

280 x 110 mm



RS 10 S

E27 SENSOR-SWITCHED INDOOR LIGHT

EAN 4007841730512

E-Nr. 920622009

Technical Data

DIMENSIONS					
Dimensions Ø × H	280 x 110 mm	Mechanical scalability	No	Base light function	No
ELECTRICAL		Radial range	Ø 8 m (50 m²)	Settings via	Potentiometers
Mains connection	230 – 240 V / 50 Hz	Tangential range	Ø 8 m (50 m²)	With remote control	No
Power	60 W	Mounting height	2,00 – 4,00 m	Twilight setting teach	No
Switching output 1 resistive	800 W	Optimal mounting height	2,5 m	HOUSING & MATERIAL	
Own consumption	1,1 W	CONNECTIVITY		Impact resistance	IK03
SENSOR TECHNOLOGY		Networking	Yes	Protection class (IP)	IP44
Max. mounting height	4,00 m	Type of networking	Master/master	Protection class	II
Sensor technology	High frequency	Networking via	Cable	Ambient temperature	from -20 up to 40 °C
Transmission power	< 1 mW	LIGHTING TECHNOLOGY		Housing material	Aluminium
HF technology	5,8 GHz	With illuminant	No	Cover material	Glass opal
With motion detector	Yes	Illuminant	All-purpose lamp	Mounting location	ceiling wall
Detection	also through glass, wood and stud walls	Base	E27	Application location	Indoors
Detection angle	360 °	Soft light start	No	Mounting type	Surface wiring
Opening angle	160 °	Continuous light	selectable	Application room	Indoors WC / washroom corridor / aisle function room / ancillary room outdoors stairwell
Segment-by-segment masking	No	SETTINGS		Colour	white
Electronic scalability	Yes	Twilight switch	Yes	SCOPE OF DELIVERY & WARRANTY	
		Twilight setting	2 – 2000 lx	Manufacturer warranty	5 years
		Time setting	5 s – 15 Min.		

RS 10 S


E27 SENSOR-SWITCHED INDOOR LIGHT

EAN 4007841730512

E-Nr. 920622009

Illustrations

TECHNICAL DRAWINGS

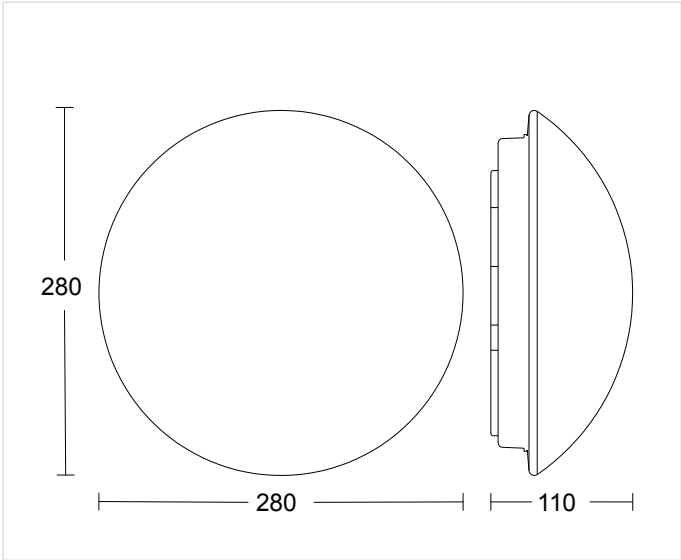

280 x 110 mm

MOUNTING HEIGHT

2,00 – 4,00 m BEREICH	2,5 m OPTIMAL	4,00 m MAX
---	-------------------------------------	----------------------------------

RS 10 S


E27 SENSOR-SWITCHED INDOOR LIGHT

EAN 4007841730512

E-Nr. 920622009

Wiring Diagrams

WIRING DIAGRAM 1

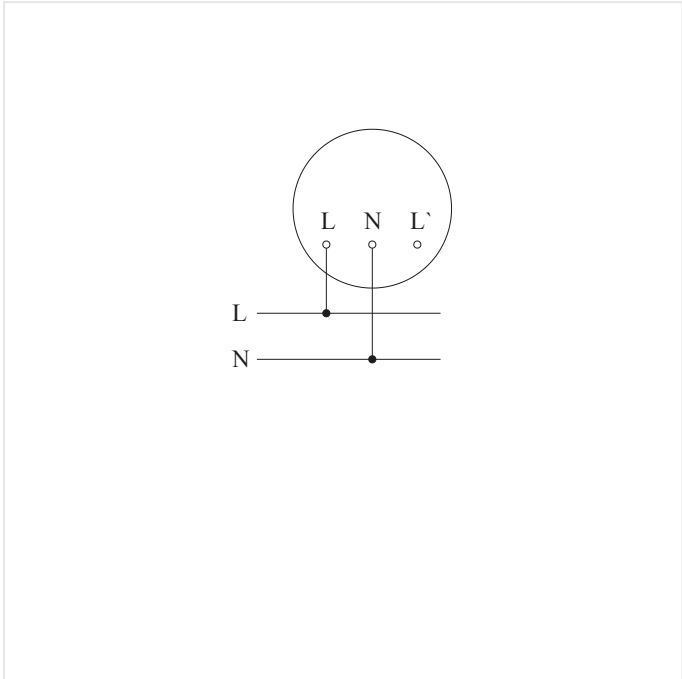

Master circuit diagram

RS 10 S

E27 SENSOR-SWITCHED INDOOR LIGHT

EAN 4007841730512

E-Nr. 920622009

Highlights



Long-life aluminium enclosure



High-quality opal glass shade



Interconnectable by cable (maximum of 5 units)



Facility for connecting fan

RS 10 S

E27 SENSOR-SWITCHED INDOOR LIGHT

EAN 4007841730512
E-Nr. 920622009

Accessories

ARTICLE NUMBER	DESCRIPTION	CATEGORY
 4007841001810	Ersatzglas für RS 10 S	Coverage

ORDERING INFORMATION

Art.-Nr.

730512

EAN

4007841730512

E-Number

920622009

Typ

RS 10 S

neva

lux

nevalux AG

Neugrütstrasse 2

8610 Uster

+41 44 508 78 78

info@nevalux.swiss