

IS 3360 DALI-2 Input Device - surface, sq.

neva
lux**PRESENCE DETECTOR**

EAN 4007841057237

E-Nr. 535943107

 **steinel**

65 x 95 x 95 mm



IS 3360 DALI-2 Input Device - surface, sq.

PRESENCE DETECTOR

EAN 4007841057237
E-Nr. 535943107

Technical Data

IDENTIFICATION					
Version	Motion and Presence Detector	Tangential range	Ø 40 m (1257 m²)	Twilight setting teach	No
DIMENSIONS		Switching zones	1416 switching zones	HOUSING & MATERIAL	
		Mounting height	2,5 – 4,00 m	Protection class (IP)	IP54
Dimensions L x W x H	65 x 95 x 95 mm	Presence range	Ø 3 m (7 m²)	Ambient temperature	from -20 up to 50 °C
ELECTRICAL		Optimal mounting height	2,8 m	Mounting location	ceiling
		CONNECTIVITY		Application location	Indoors Outdoors
Mains connection	12 – 22,5 V / 50 – 60 Hz	Networking	Yes	Mounting type	Surface wiring
Supply voltage detail	DALI bus	Type of networking	Master/slave	Material	Plastic
Switching output 1 potential-free	No	Networking via	DALI bus	Application room	Indoors WC / washroom changing room function room / ancillary room multi-storey / underground car park outdoors production facilities reception / lobby recreation room sports hall stairwell warehouse
Control output DALI	Addressable/slave	Number of DALI participants	3	Colour	white
SENSOR TECHNOLOGY		With bus coupler	Yes	RAL colour	9003
		LIGHTING TECHNOLOGY		SCOPE OF DELIVERY & WARRANTY	
Max. mounting height	4,00 m	Soft light start	No	Manufacturer warranty	5 years
Sensor technology	passive infrared	Constant light regulation	No	Corner wall bracket included	No
With motion detector	Yes	SETTINGS		CERTIFICATES & EPREL	
Detection angle	360 °	Twilight switch	Yes		
Opening angle	180 °	Twilight setting	2 – 1000 lx		
Sneak-under protection	Yes	Base light function	No		
Segment-by-segment masking	Yes	Main light adjustable	No		
Electronic scalability	No	Settings via	Bus		
Mechanical scalability	No	With remote control	No		
Radial range	Ø 8 m (50 m²)			Certificates	DALI-2

IS 3360 DALI-2 Input Device - surface, sq.
PRESENCE DETECTOR

EAN 4007841057237
E-Nr. 535943107

Illustrations

TECHNICAL DRAWINGS



65 x 95 x 95 mm

MOUNTING HEIGHT

2,5 – 4,00 m BEREICH	2,8 m OPTIMAL	4,00 m MAX
-------------------------	------------------	---------------

IS 3360 DALI-2 Input Device - surface, sq.


PRESENCE DETECTOR

EAN 4007841057237

E-Nr. 535943107

Wiring Diagrams

WIRING DIAGRAM 1

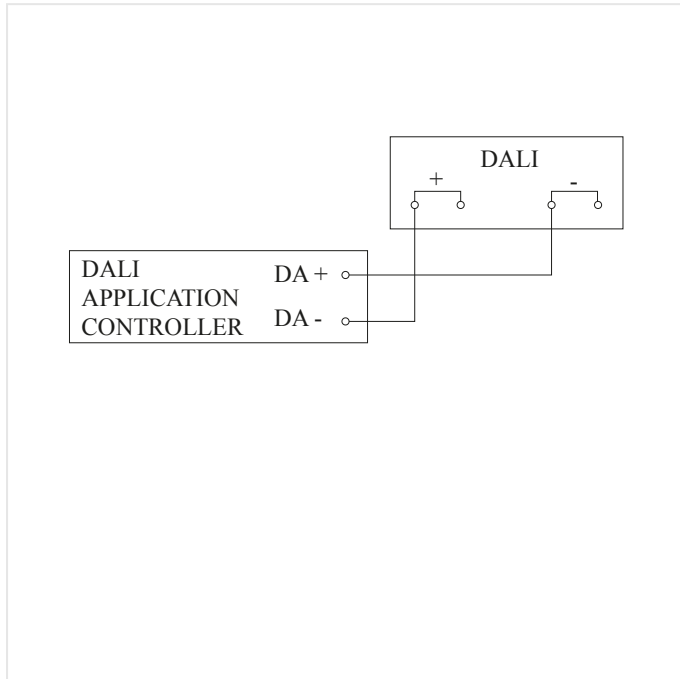

Circuit diagram

IS 3360 DALI-2 Input Device - surface, sq.

PRESENCE DETECTOR

EAN 4007841057237

E-Nr. 535943107

Highlights



UV-resistant plastic



Large terminal compartment

IS 3360 DALI-2 Input Device - surface, sq.
PRESENCE DETECTOR

EAN 4007841057237
E-Nr. 535943107

Accessories

ARTICLE NUMBER	DESCRIPTION	CATEGORY
 4007841009151	Smart Remote	Accessory
 4007841056711	Schwarze Blende für IR-Sensoren Aufputz eckig	Accessory
 4007841056735	Schwarze Blende für IR-Sensoren Aufputz rund	Accessory

ORDERING INFORMATION

Art.-Nr.

057237

EAN

4007841057237

E-Number

535943107

Typ

IS 3360 DALI-2 Input Device - surface, sq.

neva
lux

nevalux AG
Neugrütstrasse 2
8610 Uster
+41 44 508 78 78
info@nevalux.swiss