

IS 3360 MX Highbay PF - surface, sq.

MOTION DETECTOR

neva
lux

EAN 4007841033583

E-Nr. 535946407

 **steinel**

65 x 95 x 95 mm



IS 3360 MX Highbay PF - surface, sq.

MOTION DETECTOR

EAN 4007841033583

E-Nr. 535946407

Technical Data

IDENTIFICATION					
Version	Motion detectors	Opening angle	180 °	Main light adjustable	No
DIMENSIONS		Sneak-under protection	Yes	Functions	Normal / test mode Manual ON / ON-OFF
Dimensions L x W x H	65 x 95 x 95 mm	Segment-by-segment masking	Yes	Settings via	Remote control Potentiometers Smart Remote
ELECTRICAL		Electronic scalability	No	With remote control	No
Mains connection	220 – 240 V / 50 – 60 Hz	Mechanical scalability	No	Twilight setting teach	Yes
Power	2000 W	Radial range	Ø 14 m (154 m²)	HOUSING & MATERIAL	
Fluorescent lamps ECG	1500 W	Tangential range	Ø 36 m (1018 m²)	Protection class (IP)	IP54
Fluorescent lamps uncompensated	1000 VA	Switching zones	1416 switching zones	Ambient temperature	from -20 up to 50 °C
Fluorescent lamps series-compensated	400 VA	Mounting height	4,00 – 14,00 m	Housing material	Plastic
Fluorescent lamps parallel-compensated	400 VA	Optimal mounting height	12 m	Cover material	Plastic, opal
Switching output 1 low-voltage halogen lamps	2000 VA	CONNECTIVITY		Cover material (scope of delivery)	shrouds
LED lamps < 2 W	100 W	Networking	Yes	Mounting location	ceiling
LED lamps > 2 W < 8 W	300 W	Type of networking	Master/master	Application location	Indoors
LED lamps > 8 W	600 W	Networking via	Cable	Mounting type	Surface wiring
Capacitive load in µF	176 µF	LIGHTING TECHNOLOGY		Material	Plastic
SENSOR TECHNOLOGY		Soft light start	No	Application room	Indoors high-bay warehouse sports hall
Max. mounting height	14,00 m	Continuous light	selectable, 4h	Colour	white
Sensor technology	passive infrared	Constant light regulation	No	RAL colour	9003
With motion detector	Yes	SETTINGS		SCOPE OF DELIVERY & WARRANTY	
Detection angle	360 °	Twilight switch	Yes	Manufacturer warranty	5 years
		Twilight setting	2 – 1000 lx	Corner wall bracket included	No
		Time setting	5 s – 15 Min.		
		Base light function	No		

IS 3360 MX Highbay PF - surface, sq.


EAN 4007841033583

MOTION DETECTOR

E-Nr. 535946407

Illustrations

TECHNICAL DRAWINGS

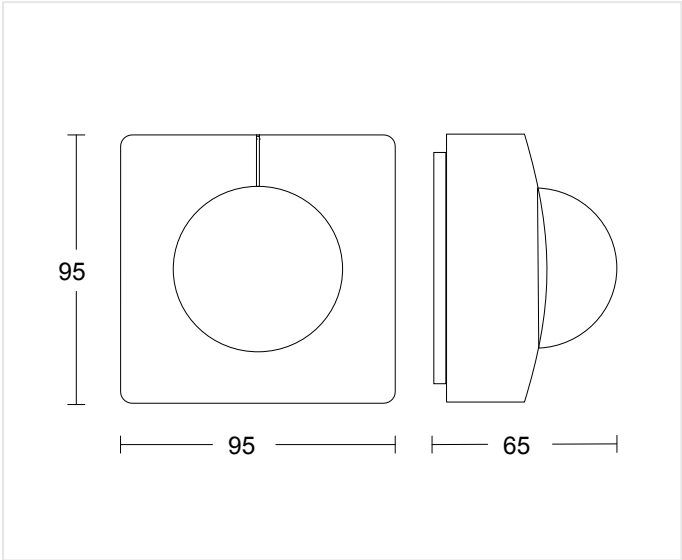

65 x 95 x 95 mm

MOUNTING HEIGHT

4,00 – 14,00 m BEREICH	12 m OPTIMAL	14,00 m MAX
--	------------------------------------	-----------------------------------

IS 3360 MX Highbay PF - surface, sq.


MOTION DETECTOR

EAN 4007841033583

E-Nr. 535946407

Wiring Diagrams

WIRING DIAGRAM 1

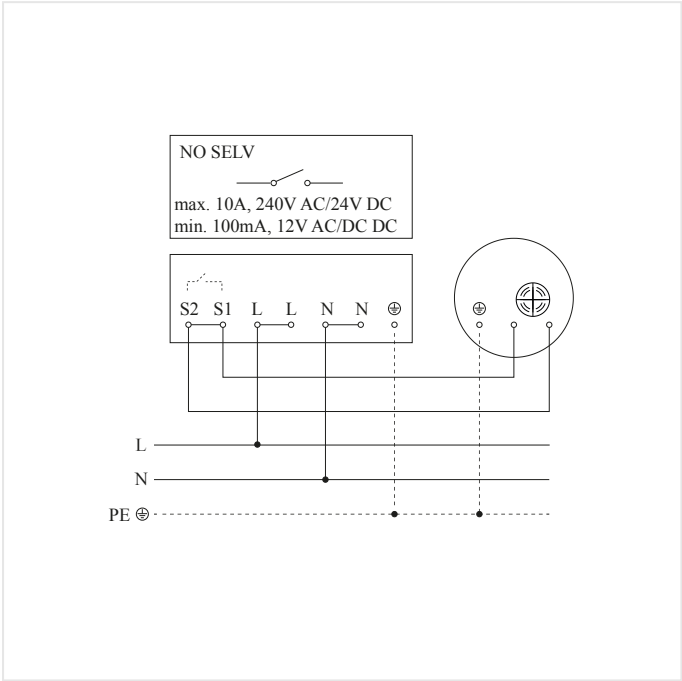

Master circuit diagram

IS 3360 MX Highbay PF - surface, sq.

MOTION DETECTOR


EAN 4007841033583

E-Nr. 535946407

Highlights



UV-resistant plastic

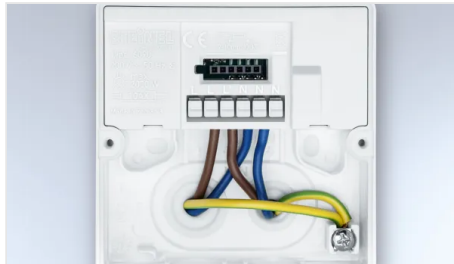

Large terminal compartment



Optional remote controls

IS 3360 MX Highbay PF - surface, sq.
MOTION DETECTOR

EAN 4007841033583
E-Nr. 535946407

Accessories

ARTICLE NUMBER	DESCRIPTION	CATEGORY
 4007841009151	Smart Remote	Accessory
 4007841559410	Service Fernbedienung RC8	Accessory
 4007841056711	Schwarze Blende für IR-Sensoren Aufputz eckig	Accessory
 4007841056735	Schwarze Blende für IR-Sensoren Aufputz rund	Accessory

ORDERING INFORMATION

Art.-Nr.

033583

EAN

4007841033583

E-Number

535946407

Typ

IS 3360 MX Highbay PF - surface, sq.

nevalux

nevalux AG
Neugrütstrasse 2
8610 Uster
+41 44 508 78 78
info@nevalux.swiss