

True Presence IP - concealed

PRESENCE DETECTOR

neva
lux

EAN 4007841066031

E-Nr. 535933908

● steinel

52 x 103 x 103 mm



True Presence IP - concealed

PRESENCE DETECTOR

EAN 4007841066031

E-Nr. 535933908

Technical Data

IDENTIFICATION		Mechanical scalability		No	With remote control		No
Version	Presence detector	Radial range	Ø 15 m (177 m²)		Twilight setting teach		No
DIMENSIONS		Tangential range	Ø 15 m (177 m²)		HOUSING & MATERIAL		
Dimensions L x W x H	52 x 103 x 103 mm	Mounting height	2,00 – 12,00 m		Protection class (IP)		IP20
ELECTRICAL		Presence range	Ø 15 m (177 m²)		Ambient temperature		from -20 up to 50 °C
Own consumption	1,1 W	True Presence range	Ø 9 m (64 m²)		Mounting location		ceiling
Supply voltage detail	Passive PoE SELV, standard PoE (IEEE 802.3 af)	Optimal mounting height	2,8 m		Application location		Indoors
SENSOR TECHNOLOGY		CONNECTIVITY			Mounting type		Concealed wiring
Max. mounting height	12,00 m	Networking	Yes		Material		Plastic
Sensor technology	High frequency	Networking via	Bluetooth DALI bus		Application room		Indoors WC / washroom care room changing room classroom conference room / meeting room dining hall / staff restaurant duty room high-bay warehouse hotel room kitchenette lecture hall one-person office open-plan office production facilities reception / lobby recreation room sports hall warehouse
Transmission power	< 1 mW	With bus coupler	Yes		SCOPE OF DELIVERY & WARRANTY		
HF technology	7,2 GHz	LIGHTING TECHNOLOGY			Colour		white
With motion detector	Yes	Soft light start	No		RAL colour		9003
Detection	also through glass, wood and stud walls	Continuous light	selectable		Manufacturer warranty		
Detection angle	360 °	Constant light regulation	No				5 years
Opening angle	160 °	SETTINGS			Corner wall bracket included		No
Sneak-under protection	Yes	Twilight switch	Yes				
Segment-by-segment masking	No	Twilight setting	2 – 1000 lx				
Electronic scalability	Yes	Base light function	No				
		Main light adjustable	No				
		Settings via	Bluetooth Web-Interface				


True Presence IP - concealed

PRESENCE DETECTOR

EAN 4007841066031
E-Nr. 535933908

Illustrations

TECHNICAL DRAWINGS

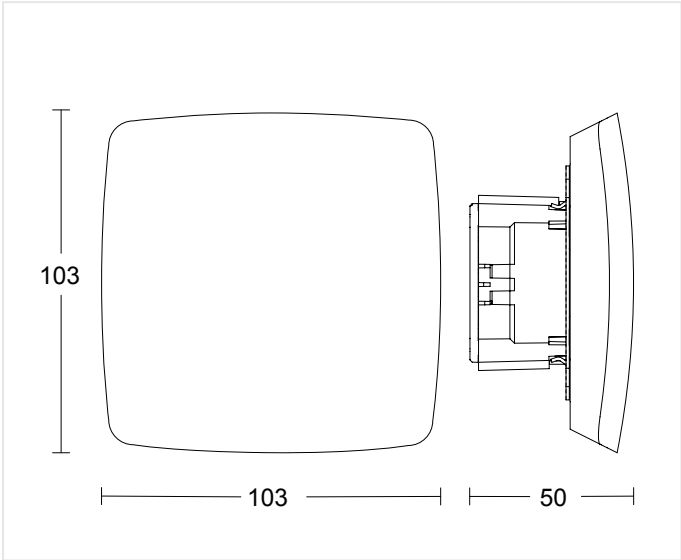

52 x 103 x 103 mm

MOUNTING HEIGHT

2,00 – 12,00 m BEREICH	2,8 m OPTIMAL	12,00 m MAX
---------------------------	------------------	----------------

True Presence IP - concealed

PRESENCE DETECTOR


EAN 4007841066031

E-Nr. 535933908

Highlights



UV-resistant plastic

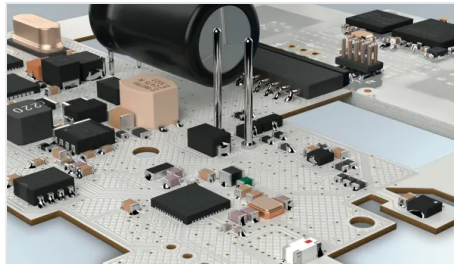

Digital high frequency sensor

True Presence IP - concealed

PRESENCE DETECTOR

EAN 4007841066031

E-Nr. 535933908

Accessories

ORDERING INFORMATION		neva lux	
Art.-Nr.	066031	nevalux AG	
EAN	4007841066031	Neugrütstrasse 2	
E-Number	535933908	8610 Uster	
Typ	True Presence IP - concealed	+41 44 508 78 78	
		info@nevalux.swiss	