

HF 360-2 KNX - Surface wiring

PRESENCE DETECTOR

neva
lux

EAN 4007841064860

E-Nr. 535931608

● steinel

57 x 123 x 123 mm



HF 360-2 KNX - Surface wiring

PRESENCE DETECTOR

EAN 4007841064860
E-Nr. 535931608

Technical Data

IDENTIFICATION		Range detail		1 or 2 detection directions can be masked out by stickers for adjustment to the room situation.		SETTINGS	
Version	Presence detector					Twilight switch	Yes
DIMENSIONS						Twilight setting	2 – 1000 lx
Dimensions L x W x H	57 x 123 x 123 mm	Radial range		Ø 12 m (113 m²)		Time setting	10 s – 1092 Min.
		Tangential range		Ø 12 m (113 m²)		Base light function	Yes
ELECTRICAL		Mounting height		2,50 – 4,00 m		Main light adjustable	0 - 100 %
Mains connection	30 V	Optimal mounting height		2,8 m		Settings via	ETS software Bluetooth Bus
Supply voltage detail	KNX bus	CONNECTIVITY				With remote control	No
SENSOR TECHNOLOGY		Networking		Yes		Twilight setting teach	Yes
Max. mounting height	4,00 m	Type of networking	Master/master	Master/slave		HOUSING & MATERIAL	
Sensor technology	High frequency	Networking via		KNX bus		Protection class (IP)	IP20
Transmission power	< 1 mW	KNX functions	Comfort	Photo-cell controller		Ambient temperature	from -25 up to 50 °C
HF technology	5,8 GHz		Individual pyro evaluation			Mounting location	ceiling
With motion detector	Yes		Basic light level function			Application location	Indoors
Detection	also through glass, wood and stud walls		Light level HVAC output			Mounting type	Surface wiring
Detection angle	360 °		Constant-lighting control			Material	Plastic
Opening angle	140 °		Light output 4x Humidity output Presence output Day / night function Dewpoint Temperature output Logic gate			Application room	Indoors WC / washroom function room / ancillary room kitchenette stairwell
Sneak-under protection	Yes	With bus coupler		Yes		Colour	white
Segment-by-segment masking	No	LIGHTING TECHNOLOGY				RAL colour	9003
Electronic scalability	Yes	Soft light start		Yes		SCOPE OF DELIVERY & WARRANTY	
Mechanical scalability	No	Continuous light		selectable		Manufacturer warranty	5 years
		Constant light regulation		Yes		Corner wall bracket included	No


HF 360-2 KNX - Surface wiring

PRESENCE DETECTOR

EAN 4007841064860
E-Nr. 535931608

Illustrations

TECHNICAL DRAWINGS

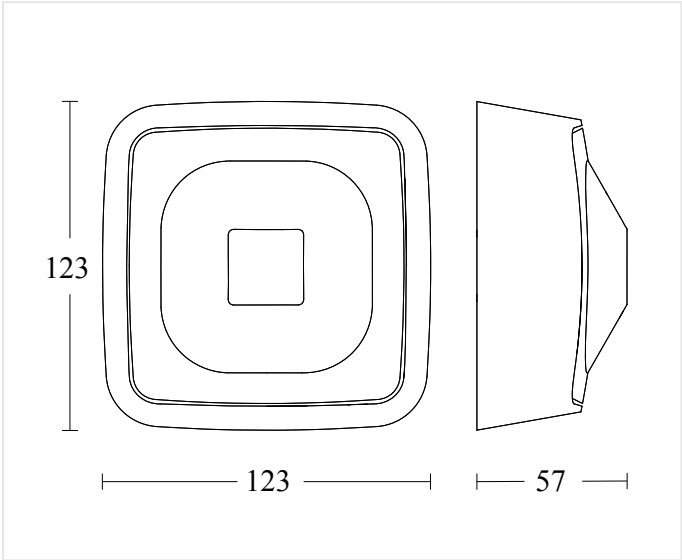

57 x 123 x 123 mm

MOUNTING HEIGHT

2,50 – 4,00 m BEREICH	2,8 m OPTIMAL	4,00 m MAX
--------------------------	------------------	---------------

HF 360-2 KNX - Surface wiring

PRESENCE DETECTOR

EAN 4007841064860

E-Nr. 535931608

Highlights



UV-resistant plastic

HF 360-2 KNX - Surface wiring

PRESENCE DETECTOR

EAN 4007841064860

E-Nr. 535931608

Accessories

ORDERING INFORMATION

Art.-Nr.	064860
EAN	4007841064860
E-Number	535931608
Typ	HF 360-2 KNX - Surface wiring

neva
lux

nevalux AG
Neugrütstrasse 2
8610 Uster
+41 44 508 78 78
info@nevalux.swiss