

IS 345 KNX - concealed, rd. black

MOTION DETECTOR

neva
lux

EAN 4007841084165

E-Nr. 535918143

● steinel

124 x 78 mm



IS 345 KNX - concealed, rd. black

MOTION DETECTOR

EAN 4007841084165
E-Nr. 535918143

Technical Data

IDENTIFICATION		Mounting height		2,50 – 5,00 m	Main light adjustable		0 - 100 %
Version	Motion detectors	Optimal mounting height		2,5 m	Settings via		ETS software Remote control Bus Smart Remote
DIMENSIONS		CONNECTIVITY			With remote control		No
Dimensions L x W x H	78 x 94 x 94 mm	Networking		Yes	Twilight setting teach		Yes
Dimensions Ø x H	124 x 78 mm	Type of networking		Master/slave	HOUSING & MATERIAL		
ELECTRICAL		Networking via		KNX bus	Protection class (IP)		IP20
Supply voltage detail	KNX bus	KNX functions		Photo-cell controller Basic light level function Light level HVAC output Constant- lighting control Light output 2x Presence output Day / night function Logic gate	Ambient temperature		from -20 up to 50 °C
SENSOR TECHNOLOGY		With bus coupler		Yes	Mounting location		ceiling
Max. mounting height	5,00 m	LIGHTING TECHNOLOGY			Application location		Indoors
Sensor technology	passive infrared	Soft light start		Yes	Mounting type		Concealed wiring
Detection angle	360 °	Continuous light		selectable	Material		Plastic
Opening angle	45 °	Constant light regulation		Yes	Application room		Indoors corridor / aisle multi-storey / underground car park
Sneak-under protection	Yes	SETTINGS			Colour		black
Segment-by-segment masking	Yes	Twilight switch		Yes	RAL colour		9005
Electronic scalability	No	Twilight setting		2 – 1000 lx	SCOPE OF DELIVERY & WARRANTY		
Mechanical scalability	No	Time setting		5 s – 15 Min.	Manufacturer warranty		5 years
Radial range	12 x 6 m (72 m²)	Base light function		Yes	Corner wall bracket included		No
Tangential range	23 x 6 m (138 m²)						
Switching zones	280 switching zones						

IS 345 KNX - concealed, rd. black


MOTION DETECTOR

EAN 4007841084165

E-Nr. 535918143

Illustrations

TECHNICAL DRAWINGS

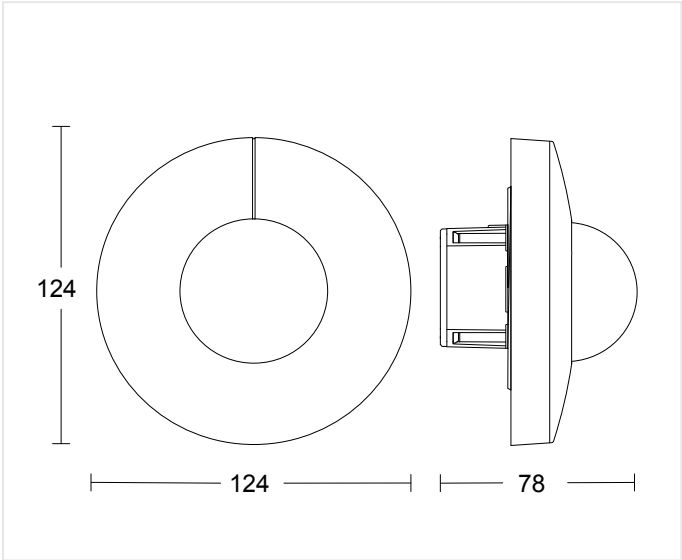

124 x 78 mm

MOUNTING HEIGHT

2,50 – 5,00 m BEREICH	2,5 m OPTIMAL	5,00 m MAX
--------------------------	------------------	---------------

IS 345 KNX - concealed, rd. black

MOTION DETECTOR

EAN 4007841084165

E-Nr. 535918143

Highlights



UV-resistant plastic



Optional remote controls



Smart Remote remote control optional

IS 345 KNX - concealed, rd. black

MOTION DETECTOR

EAN 4007841084165

E-Nr. 535918143

Accessories

ORDERING INFORMATION	
Art.-Nr.	084165
EAN	4007841084165
E-Number	535918143
Typ	IS 345 KNX - concealed, rd. black
nevalux nevalux AG Neugrütstrasse 2 8610 Uster +41 44 508 78 78 info@nevalux.swiss	