

Hallway KNX - in-ceiling installation

PRESENCE DETECTOR

neva
lux

EAN 4007841079475

E-Nr. 535918133

● steinel

105 x 103 x 103 mm



Hallway KNX - in-ceiling installation

PRESENCE DETECTOR

EAN 4007841079475
E-Nr. 535918133

Technical Data

IDENTIFICATION					
Version	Presence detector	Radial range	25 x 3 m (75 m²)	Twilight setting	10 – 1000 lx
DIMENSIONS		Tangential range	25 x 3 m (75 m²)	Time setting	10 s – 1092 Min.
Dimensions L x W x H	105 x 103 x 103 mm	Mounting height	2 – 4 m	Base light function	Yes
ELECTRICAL		Optimal mounting height	2,8 m	Main light adjustable	0 - 100 %
Mains connection	30 V	CONNECTIVITY		Settings via	ETS software Bluetooth Bus
Own consumption	0,7 W	Networking	Yes	With remote control	No
Supply voltage detail	KNX bus	Type of networking	Master/master Master/slave	Twilight setting teach	Yes
SENSOR TECHNOLOGY		Networking via	KNX bus	HOUSING & MATERIAL	
Max. mounting height	4,00 m	KNX functions	Comfort Photo-cell controller Individual pyro evaluation Basic light level function Light level HVAC output Constant-lighting control Light output 4x Presence output Day / night function Dewpoint Logic gate Humidity output Temperature output	Protection class (IP)	IP20
Sensor technology	High frequency	With bus coupler	Yes	Ambient temperature	from -25 up to 50 °C
Transmission power	< 1 mW	LIGHTING TECHNOLOGY		Mounting location	ceiling
HF technology	5,8 GHz	Soft light start	Yes	Application location	Indoors
With motion detector	Yes	Continuous light	selectable	Mounting type	In-ceiling installation
Detection	also through glass, wood and stud walls	Constant light regulation	Yes	Material	Plastic
Detection angle	360 °	SETTINGS		Application room	Indoors corridor / aisle
Opening angle	140 °	Twilight switch	Yes	Colour	white
Sneak-under protection	Yes			RAL colour	9003
Segment-by-segment masking	No			SCOPE OF DELIVERY & WARRANTY	
Electronic scalability	Yes			Manufacturer warranty	5 years
Mechanical scalability	No			Corner wall bracket included	No


Hallway KNX - in-ceiling installation

PRESENCE DETECTOR

EAN 4007841079475
E-Nr. 535918133

Illustrations

TECHNICAL DRAWINGS

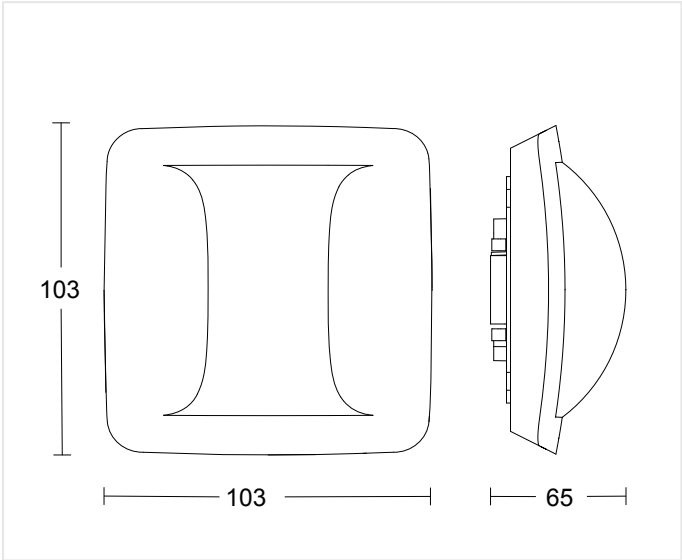

105 x 103 x 103 mm

MOUNTING HEIGHT

2 – 4 m BEREICH	2,8 m OPTIMAL	4,00 m MAX
--------------------	------------------	---------------

Hallway KNX - in-ceiling installation

PRESENCE DETECTOR

EAN 4007841079475

E-Nr. 535918133

Highlights



UV-resistant plastic

Hallway KNX - in-ceiling installation

PRESENCE DETECTOR

EAN **4007841079475**

E-Nr. **535918133**

Accessories

ORDERING INFORMATION

Art.-Nr.	079475
EAN	4007841079475
E-Number	535918133
Typ	Hallway KNX - in-ceiling installation

**neva
lux**

nevalux AG
Neugrütstrasse 2
8610 Uster
+41 44 508 78 78
info@nevalux.swiss