

IR Quattro SLIM XS 4m DALI-2 Input Device - square

neva
lux

PRESENCE DETECTOR

EAN 4007841057510

E-Nr. 535932400

 **steinel**

50 x 80 x 80 mm



IR Quattro SLIM XS 4m DALI-2 Input Device - square

PRESENCE DETECTOR

EAN 4007841057510
E-Nr. 535932400

Technical Data

IDENTIFICATION		Radial range	4 x 4 m (16 m²)	Settings via	Bus
Version	Presence detector	Tangential range	4 x 4 m (16 m²)	With remote control	No
DIMENSIONS		Switching zones	408 switching zones	Twilight setting teach	Yes
Dimensions L x W x H	50 x 80 x 80 mm	Mounting height	2,50 – 4,00 m	HOUSING & MATERIAL	
ELECTRICAL		Presence range	4 x 4 m (16 m²)	Protection class (IP)	IP20
Mains connection	16 V	Optimal mounting height	2,8 m	Ambient temperature	from 0 up to 40 °C
Supply voltage detail	DALI bus	CONNECTIVITY		Mounting location	ceiling
Switching output 2 potential-free	No	Networking	Yes	Application location	Indoors
Control output DALI	Addressable/slave	Type of networking	Master/slave	Mounting type	Concealed wiring
SENSOR TECHNOLOGY		Networking via	DALI bus	Material	Plastic
Max. mounting height	4,00 m	Number of DALI participants	2	Application room	Indoors WC / washroom care room function room / ancillary room hotel room one-person office
Sensor technology	passive infrared	With bus coupler	Yes	Colour	white
With motion detector	Yes	LIGHTING TECHNOLOGY		RAL colour	9010
Detection angle	360 °	Soft light start	No	SCOPE OF DELIVERY & WARRANTY	
Opening angle	71 °	Constant light regulation	Yes	Manufacturer warranty	5 years
Sneak-under protection	Yes	SETTINGS		Corner wall bracket included	No
Segment-by-segment masking	No	Twilight switch	Yes	CERTIFICATES & EPREL	
Electronic scalability	No	Twilight setting	10 – 1000 lx	Certificates	DALI-2
Mechanical scalability	No	Time setting	30 s – 30 Min.		
Range detail	Retina lens and hexagonal Fresnel structure	Base light function	No		
		Main light adjustable	No		


IR Quattro SLIM XS 4m DALI-2 Input Device - square

PRESENCE DETECTOR

EAN 4007841057510
E-Nr. 535932400

Illustrations

TECHNICAL DRAWINGS

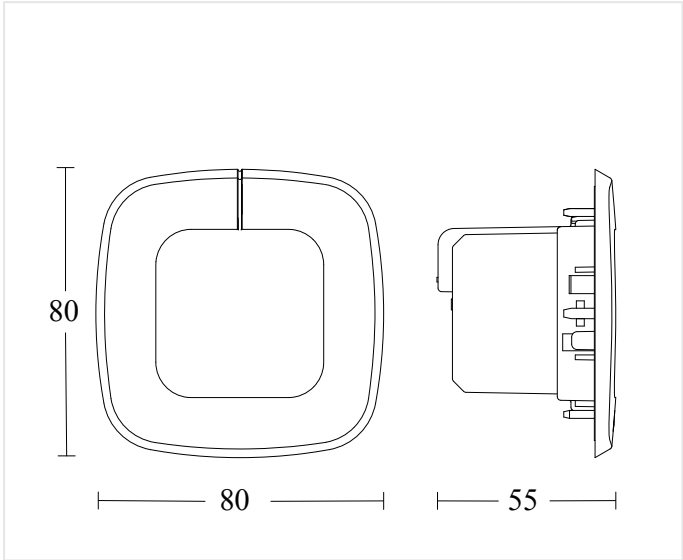

50 x 80 x 80 mm

MOUNTING HEIGHT

2,50 – 4,00 m BEREICH	2,8 m OPTIMAL	4,00 m MAX
--------------------------	------------------	---------------


IR Quattro SLIM XS 4m DALI-2 Input Device - square

PRESENCE DETECTOR

EAN 4007841057510
E-Nr. 535932400

Wiring Diagrams

WIRING DIAGRAM 1

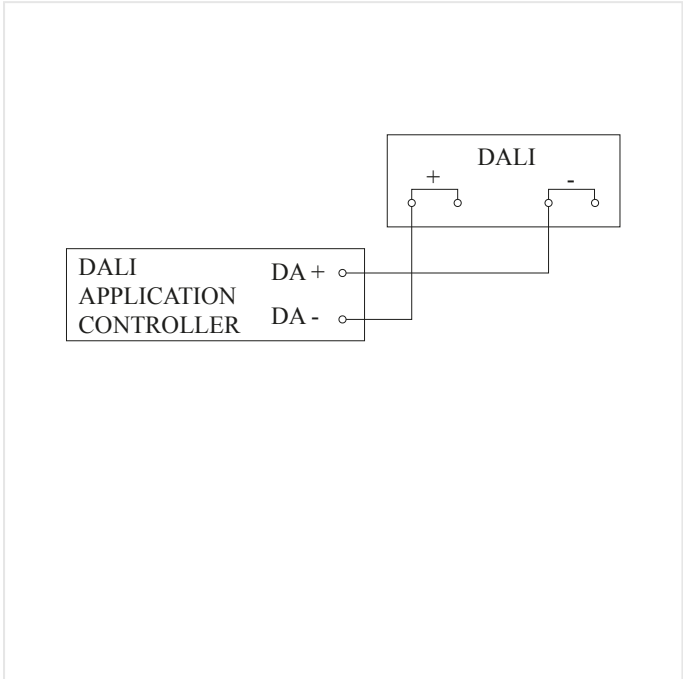

Circuit diagram


IR Quattro SLIM XS 4m DALI-2 Input Device - square

PRESENCE DETECTOR

EAN 4007841057510

E-Nr. 535932400

Highlights

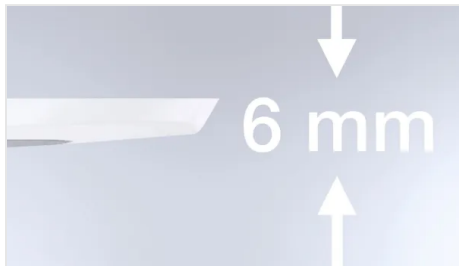

Extremely slim overall height



High-quality retina lens

IR Quattro SLIM XS 4m DALI-2 Input Device - square

PRESENCE DETECTOR

EAN 4007841057510
E-Nr. 535932400

Accessories

ARTICLE NUMBER	DESCRIPTION	CATEGORY
 4007841009151	Smart Remote	Accessory

ORDERING INFORMATION

Art.-Nr.

057510

EAN

4007841057510

E-Number

535932400

Typ

IR Quattro SLIM XS 4m DALI-2 Input Device - square

neva

lux

nevalux AG

Neugrütstrasse 2

8610 Uster

+41 44 508 78 78

info@nevalux.swiss