True Presence KNX - concealed white

PRESENCE DETECTOR

EAN 4007841056339
E-Nr. 535930011

steinel

32 x 103 x 103 mm



True Presence KNX - concealed white

PRESENCE DETECTOR

EAN 4007841056339
E-Nr. 535930011

Technical Data

IDENTIFICATION

Variant	KNX
Version	Presence detector

DIMENSIONS

Dimensions L × W × H	32 x 103 x 103 mm

ELECTRICAL

Supply voltage detail	KNX bus

SENSOR TECHNOLOGY

Max. mounting height	12,00 m
Sensor technology	High frequency
Transmission power	< 1 mW
HF technology	7,2 GHz
With motion detector	Yes
Detection	also through glass, wood and stud walls
Detection angle	360 °
Opening angle	160 °
Sneak-under protection	Yes
Segment-by-segment masking	No
Electronic scalability	Yes
Mechanical scalability	No
Radial range	Ø 15 m (177 m²)
Tangential range	Ø 15 m (177 m²)
Mounting height	2,0 – 12,0 m
Presence range	Ø 15 m (177 m²)
True Presence range	Ø 9 m (64 m²)
Optimal mounting height	2,8 m

CONNECTIVITY

Networking	Yes
Type of networking	Master/Slave, Master/Master
KNX functions	Photo-cell controller Basic light level function Light level HVAC output Constant-lighting control Light output 4x Humidity output Presence output Day / night function Dewpoint Temperature output Logic gate
With bus coupler	Yes
Control technology	Steinel Connect
Wireless networking via	BT Open Mesh
Networking via	KNX

LIGHTING TECHNOLOGY

Soft light start	Yes
Continuous light	selectable
Constant light regulation	Yes

SETTINGS

Twilight switch	Yes
Twilight setting	2 – 1000 lx
Time setting	30 s – 1092 min
Base light function	Yes
Main light adjustable	0 - 100 %
Settings via	ETS software, App, Bluetooth
With remote control	No
Twilight setting teach	Yes

HOUSING & MATERIAL

Protection class (IP)	IP20
Ambient temperature	0...+40 °C
Mounting location	ceiling
Application location	Indoors
Mounting type	Concealed mounting
Material	Plastic
Application room	Indoors, WC / washroom, care room, changing room, classroom, conference room / meeting room, dining hall / staff restaurant, duty room, high-bay warehouse, hotel room, kitchenette, lecture hall, one-person office, open-plan office, production facilities, reception / lobby, recreation room, sports hall, warehouse
Colour	White
RAL colour	9003

SCOPE OF DELIVERY & WARRANTY

Manufacturer warranty	5 years
Corner wall bracket included	No


True Presence KNX - concealed white

PRESENCE DETECTOR

EAN **4007841056339**
E-Nr. **535930011**

Illustrations

TECHNICAL DRAWINGS

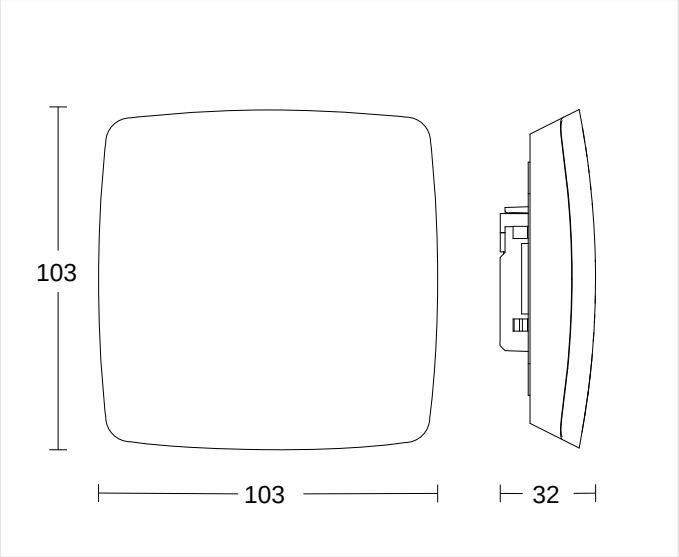

32 x 103 x 103 mm

MOUNTING HEIGHT

2,0 – 12,0 m	2,8 m	12,00 m
BEREICH	OPTIMAL	MAX

True Presence KNX - concealed white


PRESENCE DETECTOR

EAN 4007841056339
E-Nr. 535930011

Highlights



UV-resistant plastic

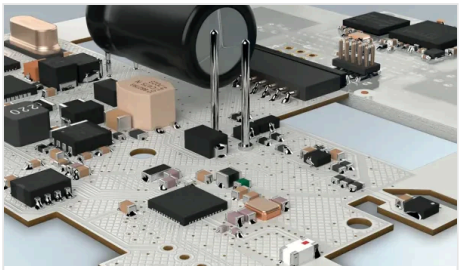


Digital high frequency sensor

True Presence KNX - concealed white

PRESENCE DETECTOR

EAN 4007841056339
E-Nr. 535930011

Accessories

	ARTICLE NUMBER	DESCRIPTION	CATEGORY
	4007841063887	**Aufputz Adapter True Presence KNX weiss**	Accessory

ORDERING INFORMATION

Art.-Nr.	056339
EAN	4007841056339
E-Number	535930011
Typ	**True Presence KNX - concealed white**

nevalux AG
Neugrütstrasse 2
8610 Uster
+41 44 508 78 78
info@nevalux.swiss