IR Quattro SLIM 4m KNX

PRESENCE DETECTOR

EAN 4007841058494
E-Nr. 535932408

- Extremely slim overall height
- High-quality retina lens
- Can only be set using optional remote controls
- Smart Remote remote control optional

steinel

55 x 77 x 77 mm



IR Quattro SLIM 4m KNX

PRESENCE DETECTOR

EAN 4007841058494
E-Nr. 535932408

Technical Data

IDENTIFICATION

Version	Presence detector

DIMENSIONS

Dimensions L × W × H	55 x 77 x 77 mm

ELECTRICAL

Supply voltage detail	KNX bus

SENSOR TECHNOLOGY

Max. mounting height	4,00 m
Sensor technology	passive infrared
With motion detector	Yes
Detection angle	360 °
Opening angle	71 °
Sneak-under protection	Yes
Segment-by-segment masking	No
Electronic scalability	No
Mechanical scalability	No
Range detail	Retina lens and hexagonal Fresnel structure
Radial range	4 x 4 m (16 m²)
Tangential range	4 x 4 m (16 m²)
Switching zones	260 switching zones
Mounting height	2,5 – 4,0 m
Presence range	4 x 4 m (16 m²)
Optimal mounting height	2,8 m

CONNECTIVITY

Networking	Yes
Type of networking	Master/Slave, Master/Master
KNX functions	Photo-cell controller\nBasic light level function\nLight level\nHVAC output\nConstant-lighting control\nLight output 4x\nPresence output\nDay / night function\nLogic gate
With bus coupler	Yes
Networking via	KNX bus

LIGHTING TECHNOLOGY

Soft light start	Yes
Continuous light	selectable
Constant light regulation	No

SETTINGS

Twilight switch	Yes
Twilight setting	10 – 1000 lx
Time setting	10 s – 1092 min
Base light function	Yes
Main light adjustable	0 - 100 %
Settings via	ETS software, Remote control, Smart Remote
With remote control	No
Twilight setting teach	Yes

HOUSING & MATERIAL

Protection class (IP)	IP20
Protection class	II
Ambient temperature	0...+40 °C
Mounting location	ceiling
Application location	Indoors
Mounting type	Recessed ceiling
Material	Plastic
Application room	Indoors, WC / washroom, care room, function room / ancillary room, hotel room, one-person office
Colour	White
RAL colour	9010

SCOPE OF DELIVERY & WARRANTY

Manufacturer warranty	5 years
Corner wall bracket included	No


IR Quattro SLIM 4m KNX

PRESENCE DETECTOR

EAN **4007841058494**
E-Nr. **535932408**

Illustrations

TECHNICAL DRAWINGS

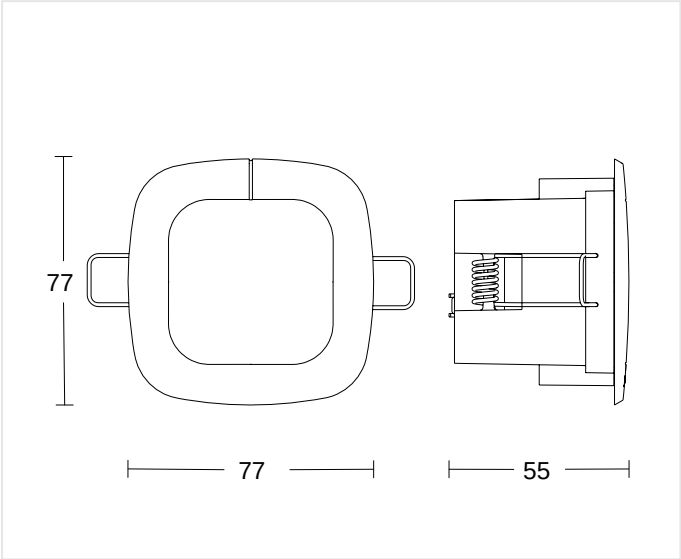

55 x 77 x 77 mm

MOUNTING HEIGHT

2,5 – 4,0 m	2,8 m	4,00 m
BEREICH	OPTIMAL	MAX

IR Quattro SLIM 4m KNX

PRESENCE DETECTOR

EAN **4007841058494**
E-Nr. **535932408**

Accessories

	ARTICLE NUMBER	DESCRIPTION	CATEGORY
	4007841009151	**Smart Remote**	Accessory
	4007841593018	**Service Fernbedienung RC6 KNX**	Accessory
	4007841592912	**Nutzer Fernbedienung RC7 KNX**	Accessory

ORDERING INFORMATION

Art.-Nr.	4007841058494
EAN	4007841058494
E-Number	535932408
Typ	**IR Quattro SLIM 4m KNX**

neva
lux

nevalux AG
Neugrütstrasse 2
8610 Uster
+41 44 508 78 78
info@nevalux.swiss