XLED PRO 240 Anthracite

LED FLOODLIGHT WITHOUT SENSOR

EAN 4007841068080
E-Nr. 941501309

steinel

161 x 180 x 199 mm



XLED PRO 240 Anthracite

LED FLOODLIGHT WITHOUT SENSOR

EAN **4007841068080**
E-Nr. **941501309**

Technical Data

DIMENSIONS

Dimensions L × W × H	**161 x 180 x 199 mm**

ELECTRICAL

Mains connection	**220 – 240 V / 50 – 60 Hz**
Power	**19,3 W**

SENSOR TECHNOLOGY

With motion detector	**No**

CONNECTIVITY

Networking	**No**

LIGHTING TECHNOLOGY

Measured luminous flux 360°	**2124 lm**
Colour temperature	**3000 K**
LED colour deviation	**SDCM3**
With illuminant	**Yes, STEINEL LED system**
Illuminant	**LED cannot be replaced**
Base	**without**
LED cooling system	**HCMC (High Conductive Magnesium Composite)**
Soft light start	**No**

LIFETIME

LED lifetime L70B50 25°C	**> 60000 h**

SETTINGS

Base light function	**No**
Main light adjustable	**No**

HOUSING & MATERIAL

Impact resistance	**IK03**
Protection class (IP)	**IP44**
Protection class	**II**
Ambient temperature	**from -20 up to 40 °C**
Housing material	**HCMC**
Cover material	**Plastic, opal**
Mounting location	**corner wall**
Application location	**Outdoors**
Mounting type	**Surface wiring**
Application room	**all round the building courtyard & driveway outdoors terrace / balcony**

SCOPE OF DELIVERY & WARRANTY

Manufacturer warranty	**5 years**
Corner wall bracket included	**No**

CERTIFICATES & EPREL

EPREL energy efficiency class	**E**
EPREL category	**Light source**


XLED PRO 240 Anthracite

LED FLOODLIGHT WITHOUT SENSOR

EAN **4007841068080**
E-Nr. **941501309**

Illustrations

TECHNICAL DRAWINGS

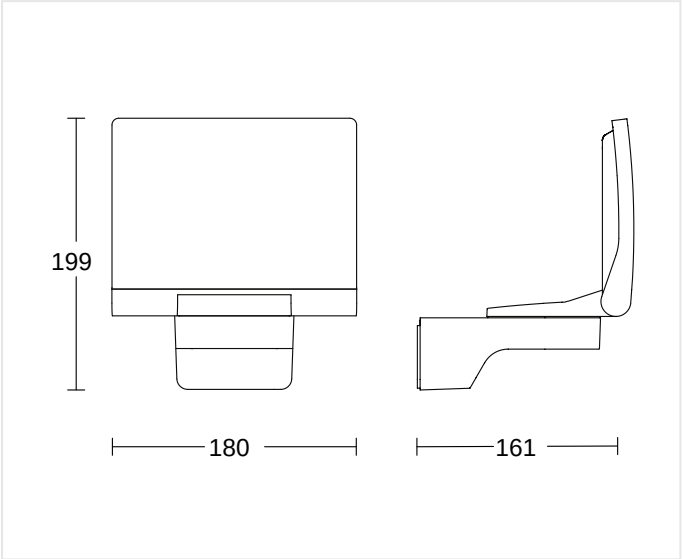

161 x 180 x 199 mm


XLED PRO 240 Anthracite

LED FLOODLIGHT WITHOUT SENSOR

EAN 4007841068080
E-Nr. 941501309

Wiring Diagrams

WIRING DIAGRAM 1

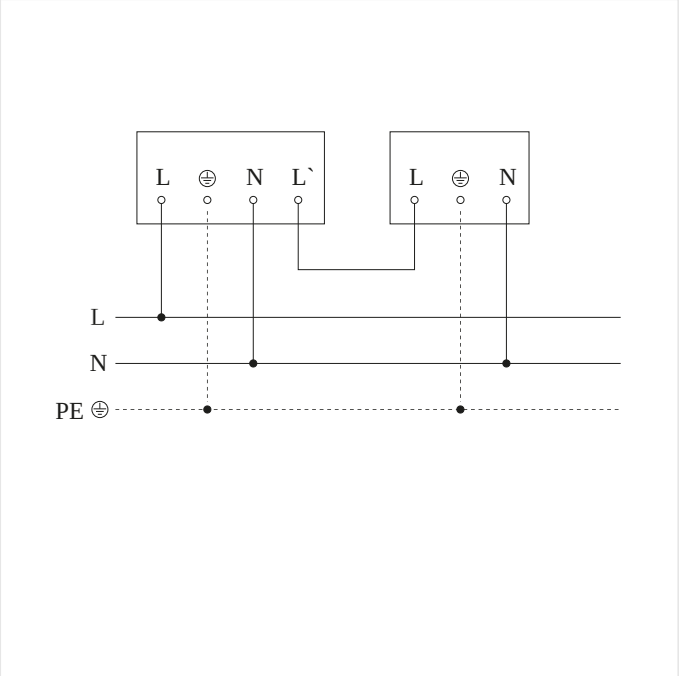

Master/slave interconnection circuit diagram

XLED PRO 240 Anthracite

LED FLOODLIGHT WITHOUT SENSOR

EAN 4007841068080
E-Nr. 941501309


Highlights



Including STEINEL LED system




HCMC cooling system

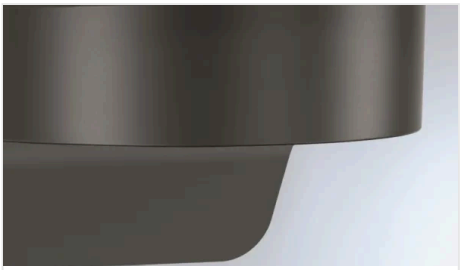


UV-resistant plastic



Colour rendering index Ra ≥80

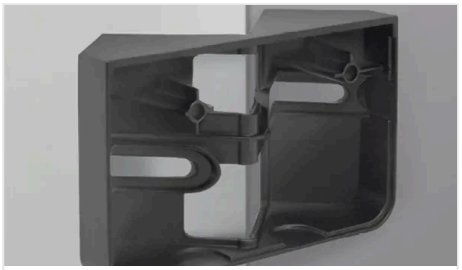

Optional corner wall mount

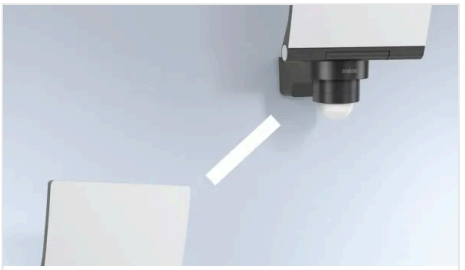

Can be interconnected with slave version

XLED PRO 240 Anthracite

LED FLOODLIGHT WITHOUT SENSOR

EAN **4007841068080**
E-Nr. **941501309**

Accessories

ORDERING INFORMATION

Art.-Nr.	068080
EAN	4007841068080
E-Number	941501309
Typ	**XLED PRO 240 Anthracite**

neva lux

nevalux AG
Neugrütstrasse 2
8610 Uster
+41 44 508 78 78
info@nevalux.swiss