

sensIQ Anthracite

MOTION DETECTOR

neva
lux

EAN 4007841056636

E-Nr. 535940350

● steinel

172 x 113 x 144 mm



sensIQ Anthracite

MOTION DETECTOR

EAN 4007841056636

E-Nr. 535940350

Technical Data


IDENTIFICATION	
Version	Motion detectors
Type of accessory	Corner adapter
DIMENSIONS	
Dimensions L x W x H	172 x 113 x 144 mm
ELECTRICAL	
Mains connection	230 V / 50 – 60 Hz
Power	2500 W
Fluorescent lamps ECG	500 W
Fluorescent lamps series-compensated	1800 VA
Fluorescent lamps parallel-compensated	500 VA
LED lamps < 2 W	100 W
LED lamps > 2 W < 8 W	250 W
LED lamps > 8 W	500 W
Capacitive load in µF	176 µF
Switching output 1 number of LED/fluorescent lamps	50 pcs.
Switching output 1 potential-free	No
SENSOR TECHNOLOGY	
Max. mounting height	5,00 m
Sensor technology	passive infrared
With motion detector	Yes
Detection angle	300 °
Opening angle	180 °

Sneak-under protection	Yes
Segment-by-segment masking	Yes
Electronic scalability	No
Mechanical scalability	Yes
Range detail	Reach adjustable from 2 - 20 m in 3 directions (100° in each)
Radial range	r = 4 m (42 m²)
Tangential range	r = 20 m (1047 m²)
Switching zones	1360 switching zones
Mounting height	2,00 – 5,00 m
Optimal mounting height	2 m
CONNECTIVITY	
Networking	Yes
Type of networking	Master/master
Networking via	Cable
LIGHTING TECHNOLOGY	
Soft light start	No
Continuous light	selectable, 4h
Constant light regulation	No
SETTINGS	
Twilight switch	Yes
Twilight setting	2 – 2000 lx
Time setting	5 s – 15 Min.
Base light function	No

Main light adjustable	No
Functions	Normal / test mode Manual ON / ON-OFF
Settings via	Remote control Potentiometers Smart Remote
With remote control	Yes
Twilight setting teach	Yes
HOUSING & MATERIAL	
Protection class (IP)	IP54
Ambient temperature	from -20 up to 50 °C
Mounting location	ceiling corner wall
Application location	Indoors Outdoors
Mounting type	Surface wiring
Material	Plastic
Application room	Indoors all round the building courtyard & driveway front door multi-storey / underground car park outdoors warehouse
Colour	Anthracite
RAL colour	7016
SCOPE OF DELIVERY & WARRANTY	
Manufacturer warranty	5 years
Corner wall bracket included	Yes
CERTIFICATES & EPREL	
Certificates	VDE

Illustrations

TECHNICAL DRAWINGS

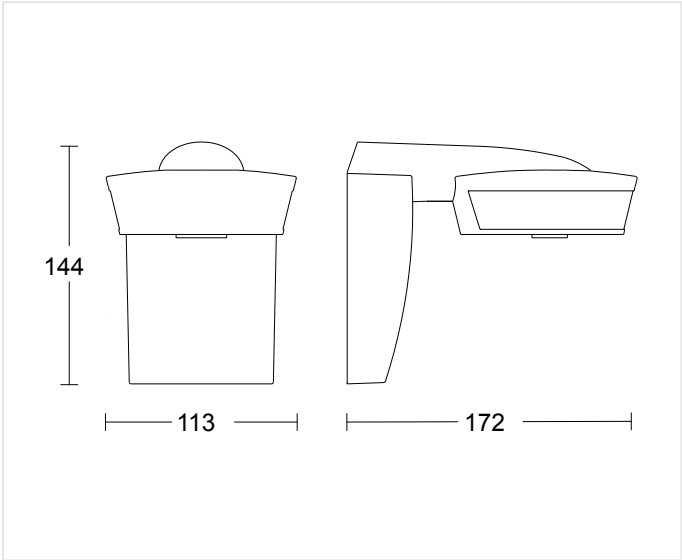

172 x 113 x 144 mm

MOUNTING HEIGHT

2,00 – 5,00 m BEREICH	2 m OPTIMAL	5,00 m MAX
--------------------------	----------------	---------------

sensIQ Anthracite


MOTION DETECTOR

EAN 4007841056636

E-Nr. 535940350


Wiring Diagrams

WIRING DIAGRAM 1

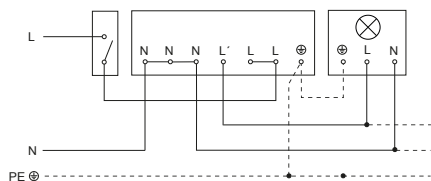

Light without neutral conductor

WIRING DIAGRAM 2

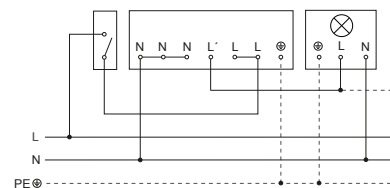

Light with neutral conductor


sensiQ Anthracite

MOTION DETECTOR

EAN 4007841056636

E-Nr. 535940350

Highlights

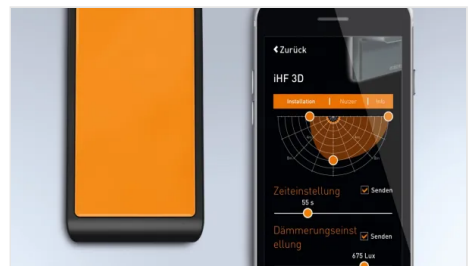**4x pyro system****Suitable for mounting on ceilings****UV-resistant plastic****Remote control RC9 included****Including corner wall mount****Smart Remote remote control optional**

Accessories

ARTICLE NUMBER	DESCRIPTION	CATEGORY
 4007841009151	Smart Remote	Accessory
 4007841007638	Fernbedienung RC9	Other

ORDERING INFORMATION

Art.-Nr.

056636

EAN

4007841056636

E-Number

535940350

Typ

sensIQ Anthracite

neva

lux

nevalux AG

Neugrütstrasse 2

8610 Uster

+41 44 508 78 78

info@nevalux.swiss