True Presence DALI-2 Input Device - surface

PRESENCE DETECTOR

EAN 4007841064501
E-Nr. 535903074

steinel



True Presence DALI-2 Input Device - surface

PRESENCE DETECTOR

EAN **4007841064501**
E-Nr. **535903074**

Technical Data

IDENTIFICATION

Variant	**DALI-2 Input Device**
Version	**Presence detector**

ELECTRICAL

Mains connection	**230 V / 50 – 60 Hz**
Control output DALI	**Addressable / slave**

SENSOR TECHNOLOGY

Max. mounting height	**12,00 m**
Sensor technology	**High frequency**
Transmission power	**< 1 mW**
HF technology	**7,2 GHz**
With motion detector	**Yes**
Detection angle	**360 °**
Opening angle	**160 °**
Sneak-under protection	**Yes**
Segment-by-segment masking	**No**
Electronic scalability	**Yes**
Mechanical scalability	**No**
Radial range	**Ø 15 m (177 m²)**
Tangential range	**Ø 15 m (177 m²)**
Mounting height	**2,0 – 12,0 m**
Presence range	**Ø 15 m (177 m²)**
True Presence range	**Ø 9 m (64 m²)**
Optimal mounting height	**2,8 m**

CONNECTIVITY

Networking	**Yes**
Number of DALI participants	**1**
With bus coupler	**Yes**
Control technology	**Steinel Connect**
Wireless networking via	**BT SIG Mesh**
Networking via	**DALI 2**

LIGHTING TECHNOLOGY

Soft light start	**No**
Continuous light	**selectable**
Constant light regulation	**No**

SETTINGS

Twilight switch	**Yes**
Twilight setting	**2 – 2000 lx**
Base light function	**No**
Main light adjustable	**No**
Settings via	**App, Smartphone, Tablet, Bus**
With remote control	**No**
Twilight setting teach	**No**

HOUSING & MATERIAL

Protection class (IP)	**IP20**
Ambient temperature	**-20...+50 °C**
Mounting location	**ceiling**
Application location	**Indoors**
Mounting type	**Surface mounting**
Material	**Plastic**
Application room	**Indoors, WC / washroom, care room, changing room, classroom, conference room / meeting room, dining hall / staff restaurant, duty room, high-bay warehouse, hotel room, kitchenette, lecture hall, one-person office, open-plan office, production facilities, reception / lobby, recreation room, sports hall, warehouse**
Colour	**White**
RAL colour	**9003**

SCOPE OF DELIVERY & WARRANTY

Manufacturer warranty	**5 years**
Corner wall bracket included	**No**

CERTIFICATES & EPREL

Certificates	**DALI-2**


True Presence DALI-2 Input Device - surface

PRESENCE DETECTOR

EAN **4007841064501**
E-Nr. **535903074**

Illustrations

TECHNICAL DRAWINGS

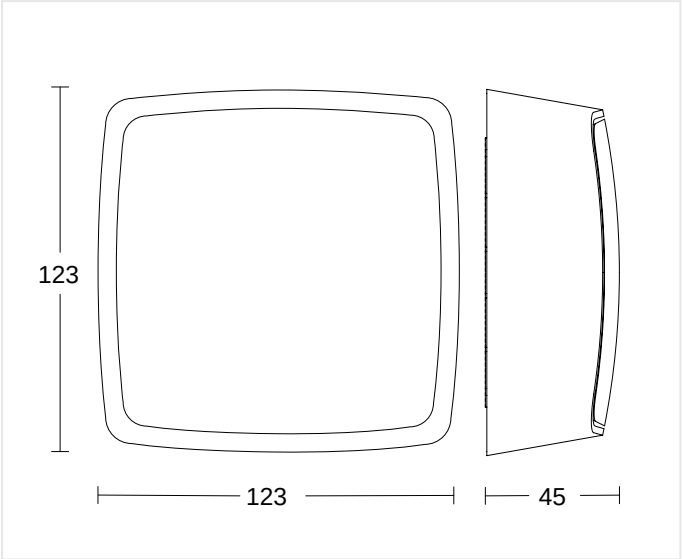

MOUNTING HEIGHT

2,0 – 12,0 m	2,8 m	12,00 m
BEREICH	OPTIMAL	MAX


True Presence DALI-2 Input Device - surface

PRESENCE DETECTOR

EAN **4007841064501**
E-Nr. **535903074**

Wiring Diagrams

WIRING DIAGRAM 1

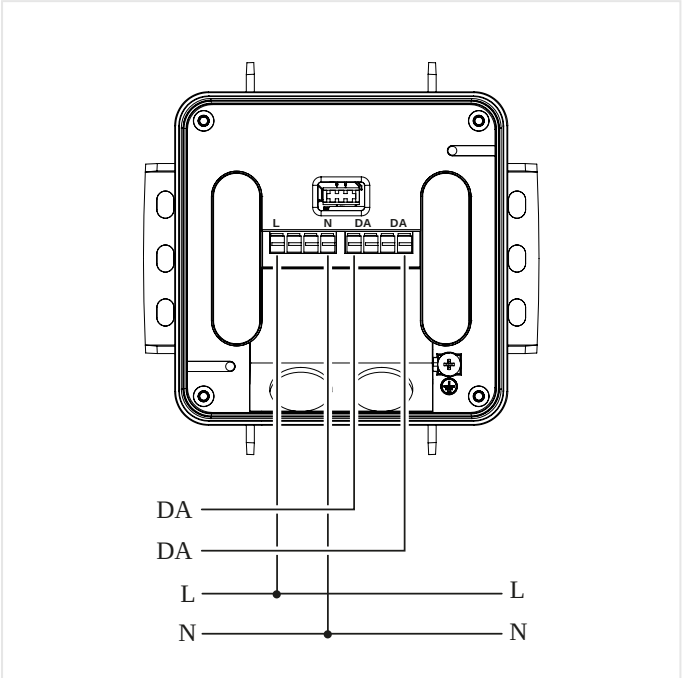

Circuit diagram for interconnecting DALI-2 APC with DALI-2 IPD

True Presence DALI-2 Input Device - surface


PRESENCE DETECTOR

EAN 4007841064501
E-Nr. 535903074

Highlights



UV-resistant plastic

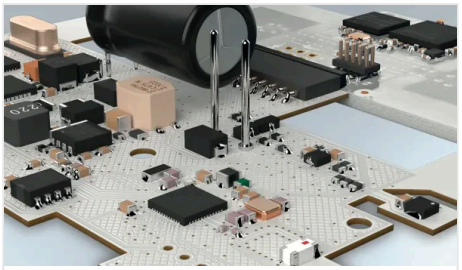

Digital high frequency sensor

True Presence DALI-2 Input Device - surface

PRESENCE DETECTOR

EAN **4007841064501**
E-Nr. **535903074**

Accessories

ORDERING INFORMATION

Art.-Nr.	064501
EAN	4007841064501
E-Number	535903074
Typ	**True Presence DALI-2 Input Device - surface**

neva
lux

nevalux AG
Neugrütstrasse 2
8610 Uster
+41 44 508 78 78
info@nevalux.swiss